

Argo

Track Light Series





FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver inside the body.
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Optical

Beam angle: 15-30 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITL-105-010-827	10W	900	2700K	60x207	N/A	0,5 kg.
ITL-105-010-830	10W	1010	3000K	60x207	N/A	0,5 kg.
ITL-105-010-840	10W	1100	4000K	60x207	N/A	0,5 kg.
ITL-105-010-865	10W	1180	6500K	60x207	N/A	0,5 kg.
ITL-105-010-800	GU10	-	-	60x207	N/A	0,5 kg.
ITL-105-010-827	10W	900	2700K	60x207	N/A	0,5 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver inside the body.
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Optical

Beam angle: 15-30-45 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values



Technical Drawing

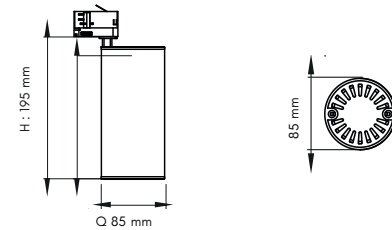

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITL-106-015-827	15W	1390	2700K	85x195	N/A	1,1 kg.
ITL-106-015-830	15W	1500	3000K	85x195	N/A	1,1 kg.
ITL-106-015-840	15W	1660	4000K	85x195	N/A	1,1 kg.
ITL-106-015-865	15W	1775	6500K	85x195	N/A	1,1 kg.
ITL-106-020-827	20W	1900	2700K	85x195	N/A	1,1 kg.
ITL-106-020-830	20W	2040	3000K	85x195	N/A	1,1 kg.
ITL-106-020-840	20W	2150	4000K	85x195	N/A	1,1 kg.
ITL-106-020-865	20W	2210	6500K	85x195	N/A	1,1 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver inside the body.
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Optical

Beam angle: 15-30-45 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values



Technical Drawing

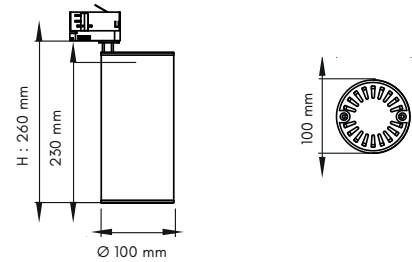

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITL-108-020-827	20W	1900	2700K	100x260	N/A	1,2 kg.
ITL-108-020-830	20W	2040	3000K	100x260	N/A	1,2 kg.
ITL-108-020-840	20W	2150	4000K	100x260	N/A	1,2 kg.
ITL-108-020-865	20W	2210	6500K	100x260	N/A	1,2 kg.
ITL-108-030-827	30W	2938	2700K	100x260	N/A	1,2 kg.
ITL-108-030-830	30W	3050	3000K	100x260	N/A	1,2 kg.
ITL-108-030-840	30W	3240	4000K	100x260	N/A	1,2 kg.
ITL-108-030-865	30W	3390	6500K	100x260	N/A	1,2 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: LED driver inside the body.
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Optical

Beam angle: 15-30-45-60 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

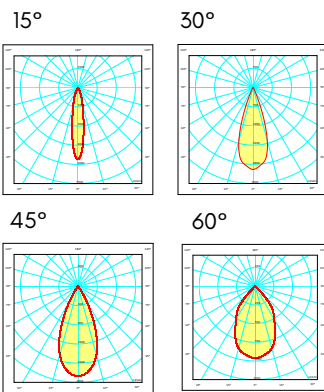

CCT Values



Technical Drawing

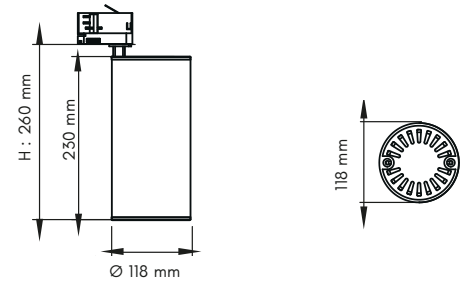

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITL-109-035-827	35W	3450	2700K	118x260	N/A	1,6 kg.
ITL-109-035-830	35W	3585	3000K	118x260	N/A	1,6 kg.
ITL-109-035-840	35W	3630	4000K	118x260	N/A	1,6 kg.
ITL-109-035-865	35W	3720	6500K	118x260	N/A	1,6 kg.
ITL-109-040-827	40W	4220	2700K	118x260	N/A	1,6 kg.
ITL-109-040-830	40W	4650	3000K	118x260	N/A	1,6 kg.
ITL-109-040-840	40W	5200	4000K	118x260	N/A	1,6 kg.
ITL-109-040-865	40W	5400	6500K	118x260	N/A	1,6 kg.

Aura

Track Light Series





FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Electrical

Driver: LED driver in horizontal driver box
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50


Optical

Beam angle: 15-30-45 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values



Technical Drawing

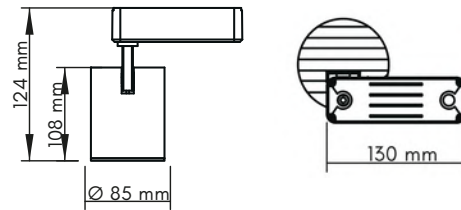

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-103-015-827	15W	1520	2700K	85x124	N/A	0,8 kg.
ITS-103-015-830	15W	1600	3000K	85x124	N/A	0,8 kg.
ITS-103-015-840	15W	1680	4000K	85x124	N/A	0,8 kg.
ITS-103-015-865	15W	1760	6500K	85x124	N/A	0,8 kg.
ITS-103-020-827	20W	2000	2700K	85x124	N/A	0,8 kg.
ITS-103-020-830	20W	2140	3000K	85x124	N/A	0,8 kg.
ITS-103-020-840	20W	2200	4000K	85x124	N/A	0,8 kg.
ITS-103-020-865	20W	2315	6500K	85x124	N/A	0,8 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Electrical

Driver: LED driver in horizontal driver box
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50


Optical

Beam angle: 15-30-45 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values



Technical Drawing

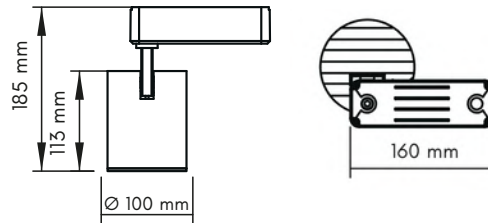

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITL-104-020-827	20W	1900	2700K	100x185	N/A	1.0 kg.
ITL-104-020-830	20W	2040	3000K	100x185	N/A	1.0 kg.
ITL-104-020-840	20W	2150	4000K	100x185	N/A	1.0 kg.
ITL-104-020-865	20W	2210	6500K	100x185	N/A	1.0 kg.
ITL-104-030-827	30W	2938	2700K	100x185	N/A	1.0 kg.
ITL-104-030-830	30W	3050	3000K	100x185	N/A	1.0 kg.
ITL-104-030-840	30W	3240	4000K	100x185	N/A	1.0 kg.
ITL-104-030-865	30W	3390	6500K	100x185	N/A	1.0 kg.

Ares

Track Light Series



www.neralight.com

NERA |
LIGHT



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Electrical

Driver: Track mounted LED driver
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Optical

Beam angle: 15-30-45-60 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

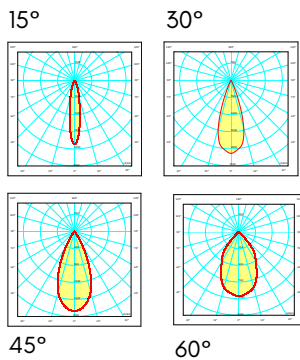

CCT Values



Technical Drawing

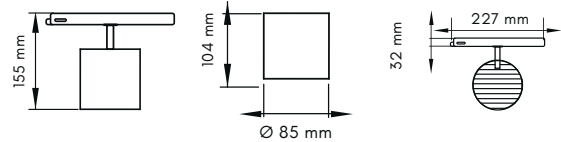

Art. No.	Watt	Lumen	CCT	Dimensions (HxW) mm.	Optics	Weight (kg.)
ITL-101-015-827	15W	1390	2700K	85x155	N/A	0,7 kg.
ITL-101-015-830	15W	1500	3000K	85x155	N/A	0,7 kg.
ITL-101-015-840	15W	1660	4000K	85x155	N/A	0,7 kg.
ITL-101-015-865	15W	1775	6500K	85x155	N/A	0,7 kg.
ITL-101-020-827	20W	1900	2700K	85x155	N/A	0,7 kg.
ITL-101-020-830	20W	2040	3000K	85x155	N/A	0,7 kg.
ITL-101-020-865	20W	2150	4000K	85x155	N/A	0,7 kg.
ITL-101-020-865	20W	2210	6500K	85x155	N/A	0,7 kg.

ARES II

ITL-102 Categories: [Interior](#), [Track Lights](#)



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options

Electrical

Driver: Track mounted LED driver
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfd>0.90
 Operating Temperature: -20 / +50


Optical

BBeam angle: 15-30-45-60 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



CCT Values



Technical Drawing

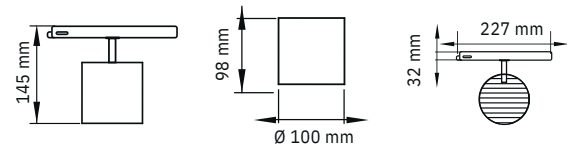

Art. No.	Watt	Lumen	CCT	Dimensions (HxW) mm.	Optics	Weight (kg.)
ITL-102-020-827	20W	1900	2700K	100x145	N/A	0,7 kg.
ITL-102-020-830	20W	2040	3000K	100x145	N/A	0,7 kg.
ITL-102-020-840	20W	2150	4000K	100x145	N/A	0,7 kg.
ITL-102-020-865	20W	2210	6500K	100x145	N/A	0,7 kg.
ITL-102-030-827	30W	2938	2700K	100x145	N/A	0,7 kg.
ITL-102-030-830	30W	3050	3000K	100x145	N/A	0,7 kg.
ITL-102-030-840	30W	3240	4000K	100x145	N/A	0,7 kg.
ITL-102-030-865	30W	3390	6500K	100x145	N/A	0,7 kg.