



# Aria

Track Light Series





## FEATURES

### Mechanical

Body: Aluminium  
 Finish: Electrostatic powder painted  
 Installation: 3-circuit track mounted  
 Diffuser: Transparent safety glass  
 Optics: Aluminium reflector

### Options

RAL selection  
 CRI>90  
 CRI>97  
 DALI  
 Casambi  
 Bluetooth control  
 Watt - lumen - efficiency options


### Electrical

Driver: LED driver inside body  
 Light source: COB LED or GU10  
 Frequency: 220-240V 50/60 Hz  
 Lifetime: 50.000 hours  
 P<sub>f</sub>>0.90  
 Operating Temperature: -20 / +50


### Optical

Beam angle: 15-30-45 degree options  
 UGR: <21  
 CRI>80  
 McAdams Step<3

## Specifications




## Photometric Data

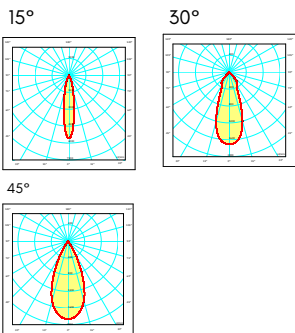

## CCT Values



## Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
ITL-120-007-827	7W	660	2700K	60x119	N/A	0,4 kg.
ITL-120-007-830	7W	680	3000K	60x119	N/A	0,4 kg.
ITL-120-007-840	7W	700	4000K	60x119	N/A	0,4 kg.
ITL-120-007-865	7W	720	6500K	60x119	N/A	0,4 kg.
ITL-120-000-000	GU10	-	-	60x119	N/A	0,4 kg.



## FEATURES

### Mechanical

Body: Aluminium  
 Finish: Electrostatic powder painted  
 Installation: 3-circuit track mounted  
 Diffuser: Transparent safety glass  
 Optics: Aluminium reflector

### Options

RAL selection  
 CRI>90  
 CRI>97  
 DALI  
 Casambi  
 Bluetooth control  
 Watt - lumen - efficiency options


### Electrical

Driver: LED driver inside body  
 Light source: COB LED or GU10  
 Frequency: 220-240V 50/60 Hz  
 Lifetime: 50,000 hours  
 P<sub>f</sub>>0.90  
 Operating Temperature: -20 / +50


### Optical

Beam angle: 15-30-45 degree options  
 UGR: <21  
 CRI>80  
 McAdams Step<3


## Specifications




## Photometric Data



## CCT Values



## Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
ITL-121-007-827	7W	660	2700K	63x105	N/A	0,4 kg.
ITL-121-007-830	7W	680	3000K	63x105	N/A	0,4 kg.
ITL-121-007-840	7W	700	4000K	63x105	N/A	0,4 kg.
ITL-121-007-865	7W	720	6500K	63x105	N/A	0,4 kg.
ITL-121-000-000	GU10	-	-	63x105	N/A	0,4 kg.

# Aria III

ITL-122 Categories: [Interior](#), [Track Lights](#)



## FEATURES

### Mechanical

Body: Aluminium  
 Finish: Electrostatic powder painted  
 Installation: 3-circuit track mounted  
 Diffuser: Transparent safety glass  
 Optics: Aluminium reflector

### Electrical

Driver: LED driver inside body  
 Light source: COB LED or GU10  
 Frequency: 220-240V 50/60 Hz  
 Lifetime: 50.000 hours  
 P<sub>f</sub>>0.90  
 Operating Temperature: -20 / +50


### Options

RAL selection  
 CRI>90  
 CRI>97  
 DALI  
 Casambi  
 Bluetooth control  
 Watt - lumen - efficiency options


### Optical

Beam angle: 15-30-45 degree options  
 UGR: <21  
 CRI>80  
 McAdams Step<3

## Specifications




## Photometric Data



## CCT Values



## Technical Drawing

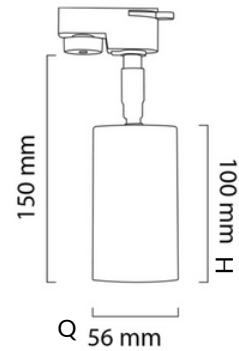

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITL-122-007-827	7W	660	2700K	56X100	N/A	0,4 kg.
ITL-122-007-830	7W	680	3000K	56X100	N/A	0,4 kg.
ITL-122-007-840	7W	700	4000K	56X100	N/A	0,4 kg.
ITL-122-007-865	7W	720	6500K	56X100	N/A	0,4 kg.
ITL-122-000-000	GU10	-	-	56X100	N/A	0,4 kg.



## FEATURES

### Mechanical

Body: Aluminium  
 Finish: Electrostatic powder painted  
 Installation: 3-circuit track mounted  
 Diffuser: Transparent safety glass  
 Optics: Aluminium reflector

### Electrical

Driver: LED driver inside body  
 Light source: COB LED or GU10  
 Frequency: 220-240V 50/60 Hz  
 Lifetime: 50,000 hours  
 P<sub>f</sub>>0.90  
 Operating Temperature: -20 / +50


### Options

RAL selection  
 CRI>90  
 CRI>97  
 DALI  
 Casambi  
 Bluetooth control  
 Watt - lumen - efficiency options


### Optical

Beam angle: 15-30-45 degree options  
 UGR: <21  
 CRI>80  
 McAdams Step<3

## Specifications




## Photometric Data



## CCT Values



## Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITL-123-007-827	7W	660	2700K	60x135	N/A	0,4 kg.
ITL-123-007-830	7W	680	3000K	60x135	N/A	0,4 kg.
ITL-123-007-840	7W	700	4000K	60x135	N/A	0,4 kg.
ITL-123-007-865	7W	720	6500K	60x135	N/A	0,4 kg.
ITL-123-000-000	GU10	-	-	60x135	N/A	0,4 kg.



## FEATURES

### Mechanical

Body: Aluminium  
 Finish: Electrostatic powder painted  
 Installation: 3-circuit track mounted  
 Diffuser: Transparent safety glass  
 Optics: Aluminium reflector

### Electrical

Driver: LED driver inside body  
 Light source: COB LED or GU10  
 Frequency: 220-240V 50/60 Hz  
 Lifetime: 50,000 hours  
 P<sub>f</sub>>0.90  
 Operating Temperature: -20 / +50


### Options

RAL selection  
 CRI>90  
 CRI>97  
 DALI  
 Casambi  
 Bluetooth control  
 Watt - lumen - efficiency options


### Optical

Beam angle: 15-30-45 degree options  
 UGR: <21  
 CRI>80  
 McAdams Step<3

## Specifications




## Photometric Data



## CCT Values



## Technical Drawing

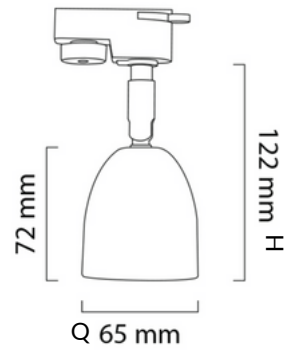

Art. No.	Watt	Lumen	CCT	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ITL-124-007-827	7W	660	2700K	65x122	N/A	0,4 kg.
ITL-124-007-830	7W	680	3000K	65x122	N/A	0,4 kg.
ITL-124-007-840	7W	700	4000K	65x122	N/A	0,4 kg.
ITL-124-007-865	7W	720	6500K	65x122	N/A	0,4 kg.
ITL-124-000-000	GU10	-	-	65x122	N/A	0,4 kg.