



Aura

Track Light Series





FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Electrical

Driver: LED driver in horizontal driver box
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50,000 hours
 P_f>0.90
 Operating Temperature: -20 / +50


Optical

Beam angle: 15-30-45 degree options
 UGR: <21
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

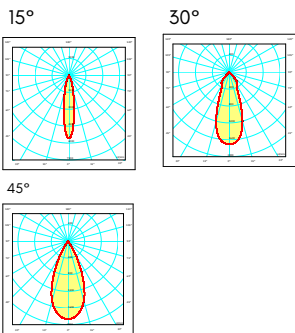

CCT Values



Technical Drawing

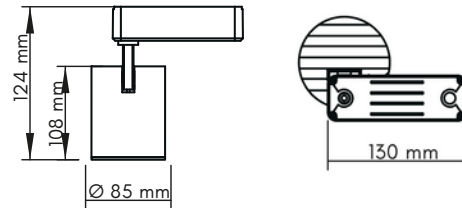

Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
ITS-103-015-827	15W	1520	2700K	85x124	N/A	0,8 kg.
ITS-103-015-830	15W	1600	3000K	85x124	N/A	0,8 kg.
ITS-103-015-840	15W	1680	4000K	85x124	N/A	0,8 kg.
ITS-103-015-865	15W	1760	6500K	85x124	N/A	0,8 kg.
ITS-103-020-827	20W	2000	2700K	85x124	N/A	0,8 kg.
ITS-103-020-830	20W	2140	3000K	85x124	N/A	0,8 kg.
ITS-103-020-840	20W	2200	4000K	85x124	N/A	0,8 kg.
ITS-103-020-865	20W	2315	6500K	85x124	N/A	0,8 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: 3-circuit track mounted
 Diffuser: Transparent safety glass
 Optics: Aluminium reflector

Options

RAL selection
 CRI>90
 CRI>97
 DALI
 Casambi
 Bluetooth control
 Watt - lumen - efficiency options


Electrical

Driver: LED driver in horizontal driver box
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50


Optical

Beam angle: 15-30-45 degree options
 UGR: <21
 CRI>80
 McAdams Step<3


Specifications




Photometric Data

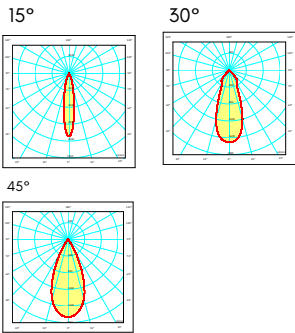

CCT Values



Technical Drawing

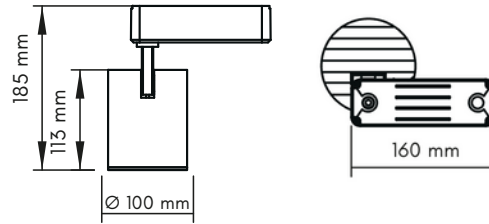

Art. No.	Watt	Lumen	CCT	Dimensions (QxH)mm.	Cut-out (mm.)	Weight (kg.)
ITL-104-020-827	20W	1900	2700K	100x185	N/A	1.0 kg.
ITL-104-020-830	20W	2040	3000K	100x185	N/A	1.0 kg.
ITL-104-020-840	20W	2150	4000K	100x185	N/A	1.0 kg.
ITL-104-020-865	20W	2210	6500K	100x185	N/A	1.0 kg.
ITL-104-030-827	30W	2938	2700K	100x185	N/A	1.0 kg.
ITL-104-030-830	30W	3050	3000K	100x185	N/A	1.0 kg.
ITL-104-030-840	30W	3240	4000K	100x185	N/A	1.0 kg.
ITL-104-030-865	30W	3390	6500K	100x185	N/A	1.0 kg.