



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Wall surface mounted
 Optics: PMMA lens

Options

RAL selection


Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf:0.90
 Operating Temperature: -20 / +50


Optical

Beam angle: Asymmetrical
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



Kelvin Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (WxHxL) mm.	Weight (kg.)
EUS-901-006-830	6W	510	3000K	70x70x160	0,6 kg.
EUS-901-006-840	6W	600	4000K	70x70x160	0,6 kg.
EUS-901-006-850	6W	660	5000K	70x70x160	0,6 kg.



FEATURES

Mechanical

Body: Aluminium
 Finish: Electrostatic powder painted
 Installation: Wall surface mounted
 Optics: PMMA lens

Options

RAL selection


Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical

Beam angle: Asymmetrical
 CRI>80
 McAdams Step<3

Specifications




Photometric Data



Kelvin Values



Technical Drawing

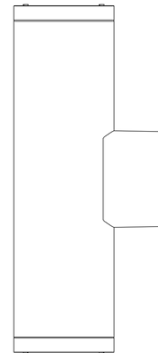

Art. No.	Watt	Lumen	CCT	Dimensions (WxHxL) mm.	Weight (kg.)
EUS-901-012-830	2x6W	2x510	3000K	70x70x240	0,9 kg.
EUS-901-012-840	2x6W	2x600	4000K	70x70x240	0,9 kg.
EUS-901-012-850	2x6W	2x660	5000K	70x70x240	0,9 kg.