



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Wall surface mounted
Optics: PMMA lens

Options

RAL selection

Electrical

Driver: LED driver inside the body
Light source: Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

Beam angle: Asymmetrical
CRI>80
McAdams Step<3

Specifications




Photometric Data



Kelvin Values



Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (AxBxC) mm.	Weight (kg.)
EUS-902-006-830	6W	510	3000K	70(W) x 160(L) x 70(H)	0,6 kg.
EUS-902-006-840	6W	600	4000K	70(W) x 160(L) x 70(H)	0,6 kg.
EUS-902-006-850	6W	660	5000K	70(W) x 160(L) x 70(H)	0,6 kg.



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Wall surface mounted
Optics: PMMA lens

Options

RAL selection

Electrical

Driver: LED driver inside the body
Light source: Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Beam angle: Asymmetrical
CRI>80
McAdams Step<3

Specifications




Photometric Data



Kelvin Values



Technical Drawing

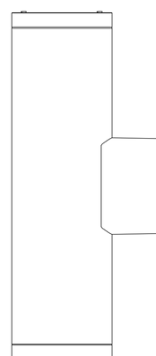

Art. No.	Watt	Lumen	CCT	Dimensions (AxBxC) mm.	Weight (kg.)
EUS-902-012-830	2x6W	2x510	3000K	70(W) x 240(L) x 70(H)	0,9 kg.
EUS-902-012-840	2x6W	2x600	4000K	70(W) x 240(L) x 70(H)	0,9 kg.
EUS-902-012-850	2x6W	2x660	5000K	70(W) x 240(L) x 70(H)	0,9 kg.