

Panera Pro-R

SKU: ITS-901 Categories: [Interior](#), [Technical](#)

NERA
LIGHT



FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Ceiling recessed mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

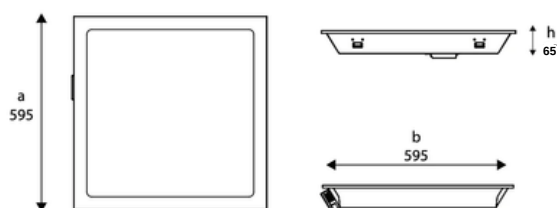


Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-901-015-827	15W	1500	2700K	295x295x65	1,0 kg.
ITS-901-015-830	15W	1550	3000K	295x295x65	1,0 kg.
ITS-901-015-840	15W	1600	4000K	295x295x65	1,0 kg.
ITS-901-015-865	15W	1650	6500K	295x295x65	1,0 kg.
ITS-902-023-827	23W	2300	2700K	295x595x65	1,8 kg.
ITS-902-023-830	23W	2350	3000K	295x595x65	1,8 kg.
ITS-902-023-840	23W	2400	4000K	295x595x65	1,8 kg.
ITS-902-023-865	23W	2450	6500K	295x595x65	1,8 kg.

Panera Pro-R

SKU: ITS-901 Categories: [Interior](#), [Technical](#)

NERA
LIGHT

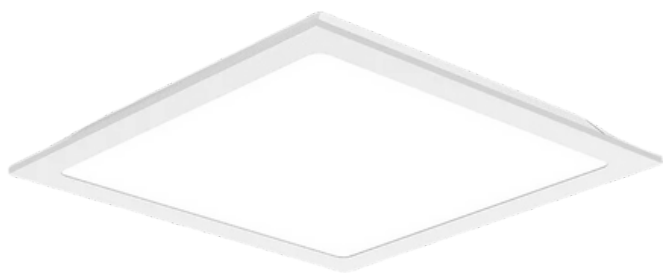

FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Ceiling recessed mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

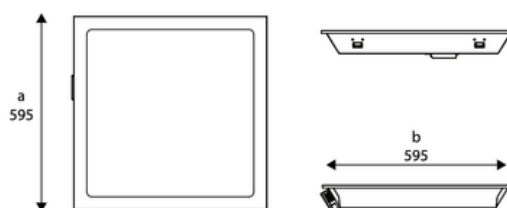


Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-903-040-827	40W	4000	2700K	295x1195x65	2,2 kg.
ITS-903-040-830	40W	4100	3000K	295x1195x65	2,2 kg.
ITS-903-040-840	40W	4210	4000K	295x1195x65	2,2 kg.
ITS-903-040-865	40W	4460	6500K	295x1195x65	2,2 kg.
ITS-904-036-827	36W	3500	2700K	595x595x65	2,2 kg.
ITS-904-036-830	36W	3610	3000K	595x595x65	2,2 kg.
ITS-904-036-840	36W	3740	4000K	595x595x65	2,2 kg.
ITS-904-036-865	36W	3910	6500K	595x595x65	2,2 kg.

Panera Pro-R

SKU: ITS-901 Categories: [Interior](#), [Technical](#)

NERA
LIGHT

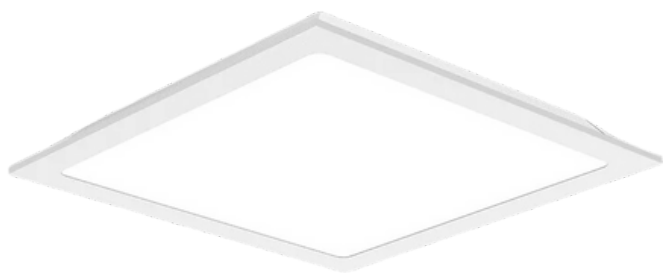

FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Ceiling recessed mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

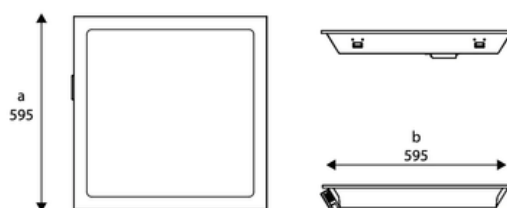

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-905-070-827	70W	7000	2700K	595x1195x65	2,2 kg.
ITS-905-070-830	70W	7170	3000K	595x1195x65	2,2 kg.
ITS-905-070-840	70W	7375	4000K	595x1195x65	2,2 kg.
ITS-905-070-865	70W	7595	6500K	595x1195x65	2,2 kg.