

Panera Pro-S

SKU: ITS-951 Categories: [Interior](#), [Technical](#)

NERA
LIGHT



FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Surface Mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

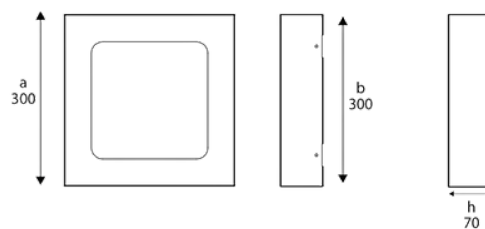

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-951-015-827	15W	1500	2700K	305x305x65	1,4 kg.
ITS-951-015-830	15W	1550	3000K	305x305x65	1,4 kg.
ITS-951-015-840	15W	1600	4000K	305x305x65	1,4 kg.
ITS-951-015-865	15W	1650	6500K	305x305x65	1,4 kg.
ITS-952-023-827	23W	2300	2700K	305x605x65	2,1 kg.
ITS-952-023-830	23W	2350	3000K	305x605x65	2,1 kg.
ITS-952-023-840	23W	2400	4000K	305x605x65	2,1 kg.
ITS-952-023-865	23W	2450	6500K	305x605x65	2,1 kg.

Panera Pro-S

SKU: ITS-951 Categories: [Interior](#), [Technical](#)

NERA
LIGHT



FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Surface Mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values




Technical Drawing

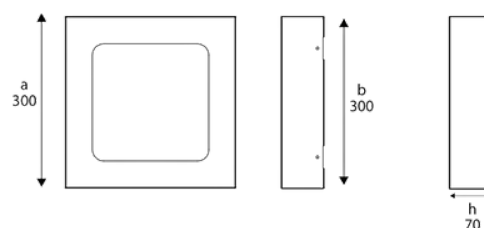

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-953-040-827	40W	4000	2700K	305x1205x65	2,8 kg.
ITS-953-040-830	40W	4100	3000K	305x1205x65	2,8 kg.
ITS-953-040-840	40W	4210	4000K	305x1205x65	2,8 kg.
ITS-953-040-865	40W	4460	6500K	305x1205x65	2,8 kg.
ITS-954-036-827	36W	3500	2700K	605x605x65	2,8 kg.
ITS-954-036-830	36W	3610	3000K	605x605x65	2,8 kg.
ITS-954-036-840	36W	3740	4000K	605x605x65	2,8 kg.
ITS-954-036-865	36W	3910	6500K	605x605x65	2,8 kg.

Panera Pro-S

SKU: ITS-951 Categories: Interior, Technical

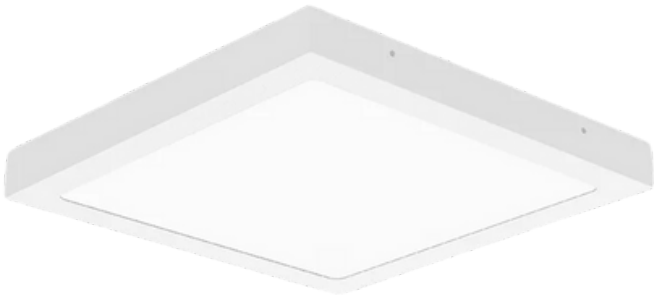

FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Surface Mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
P_f>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

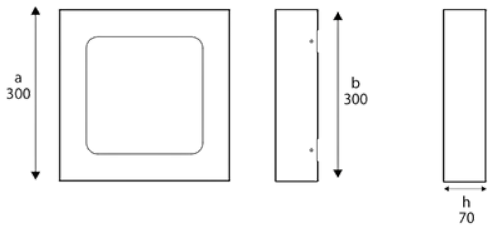

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-955-070-827	70W	7000	2700K	605x1205x65	2,8 kg.
ITS-955-070-830	70W	7170	3000K	605x1205x65	2,8 kg.
ITS-955-070-840	70W	7375	4000K	605x1205x65	2,8 kg.
ITS-955-070-865	70W	7595	6500K	605x1205x65	2,8 kg.