

Panera SR

SKU: ITS-906 Categories: [Interior](#), [Technical](#)

NERA
LIGHT



FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Ceiling recessed mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
P_f>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

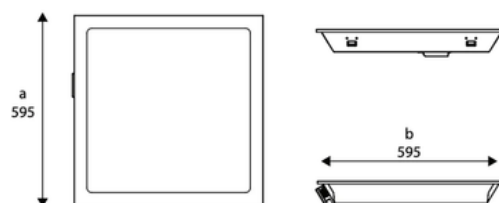

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-906-018-827	18W	1500	2700K	295x295x35	1,0 kg.
ITS-906-018-830	18W	1550	3000K	295x295x35	1,0 kg.
ITS-906-018-840	18W	1600	4000K	295x295x35	1,0 kg.
ITS-906-018-865	18W	1650	6500K	295x295x35	1,0 kg.
ITS-907-045-827	45W	4500	2700K	295x1195x35	1,8 kg.
ITS-907-045-830	45W	4550	3000K	295x1195x35	1,8 kg.
ITS-907-045-840	45W	4600	4000K	295x1195x35	1,8 kg.
ITS-907-045-865	45W	4650	6500K	295x1195x35	1,8 kg.

Panera SR

SKU: ITS-906 Categories: [Interior](#), [Technical](#)

NERA
LIGHT



FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Ceiling recessed mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
P_f>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

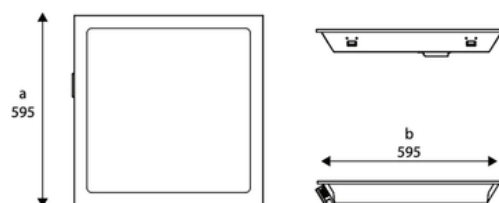

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-908-040-827	40W	4000	2700K	595x595x35	1,8 kg.
ITS-908-040-830	40W	4100	3000K	595x595x35	1,8 kg.
ITS-908-040-840	40W	4210	4000K	595x595x35	1,8 kg.
ITS-908-040-865	40W	4460	6500K	595x595x35	1,8 kg.
ITS-909-080-827	80W	8000	2700K	595x1195x35	1,8 kg.
ITS-909-080-830	80W	8070	3000K	595x1195x35	1,8 kg.
ITS-909-080-840	80W	8140	4000K	595x1195x35	1,8 kg.
ITS-909-080-865	80W	8210	6500K	595x1195x35	1,8 kg.