


Panera SS

SKU: ITS-956 Categories: [Interior](#), [Technical](#)

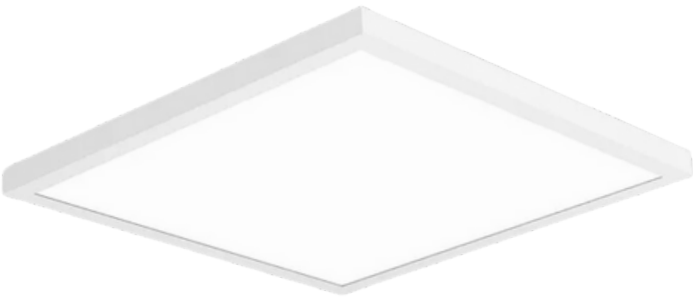

FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Surface Mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
P_f>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications




Photometric Data

CCT Values



Technical Drawing

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-956-018-827	18W	1500	2700K	300x300x45	1,0 kg.
ITS-956-018-830	18W	1550	3000K	300x300x45	1,0 kg.
ITS-956-018-840	18W	1600	4000K	300x300x45	1,0 kg.
ITS-956-018-865	18W	1650	6500K	300x300x45	1,0 kg.
ITS-957-045-827	45W	4500	2700K	300x1200x45	1,8 kg.
ITS-957-045-830	45W	4550	3000K	300x1200x45	1,8 kg.
ITS-957-045-840	45W	4600	4000K	300x1200x45	1,8 kg.
ITS-957-045-865	45W	4650	6500K	300x1200x45	1,8 kg.

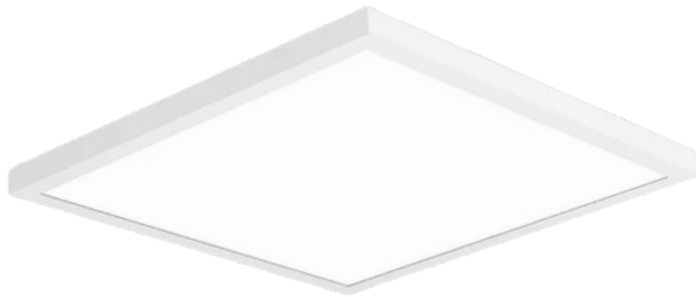

FEATURES

Mechanical

Body: DKP Metal
Finish: Electrostatic powder painted
Installation: Surface Mounted

Options

RAL selection
CBS connection
GST connector

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80
McAdams Step<3

Specifications



Photometric Data

CCT Values



Technical Drawing

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Weight (kg.)
ITS-958-040-827	40W	4000	2700K	600x600x45	1,8 kg.
ITS-958-040-830	40W	4100	3000K	600x600x45	1,8 kg.
ITS-958-040-840	40W	4210	4000K	600x600x45	1,8 kg.
ITS-958-040-865	40W	4460	6500K	600x600x45	1,8 kg.
ITS-959-080-827	80W	8000	2700K	600x1200x45	1,8 kg.
ITS-959-080-830	80W	8070	3000K	600x1200x45	1,8 kg.
ITS-959-080-840	80W	8140	4000K	600x1200x45	1,8 kg.
ITS-959-080-865	80W	8210	6500K	600x1200x45	1,8 kg.