



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Floor Placement

Options

RAL selection
CRI>90
CRI>97


Electrical

Driver: LED driver inside body
Light source: LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc>0.90
Operating Temperature: -20 / +50

Optical

UGR: <21
CRI>80

Specifications




Photometric Data

CCT Values



Technical Drawing

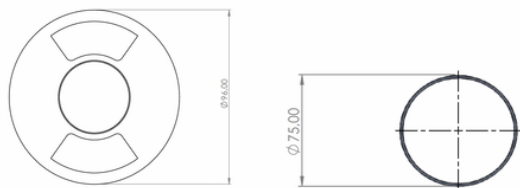

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
EUS-952-008-830	8W	720	3000K	96x100x130	75mm	1,2 kg.
EUS-952-008-840	8W	770	4000K	96x100x130	75mm	1,2 kg.
EUS-952-008-865	8W	820	6500K	96x100x130	75mm	1,2 kg.
EUS-952-005-000	GU10	-	-	96x100x130	75mm	1,2 kg.