



FEATURES

Mechanical

Body: Aluminium
Finish: Electrostatic powder painted
Installation: Surface mounted
Optics: PMMA plexiglass

Options

DALI
Length options

Electrical

Driver: LED driver inside the body
Light source: Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pfc>0.90
Operating Temperature: -20 / +50

Optical

Beam angle: Symmetrical
CRI>80
McAdams Step<3

Specifications

CRI ≥80

POWER LED

IP65

IK08

CE


UK CA

Light Beam

Kelvin Values



Technical Drawing

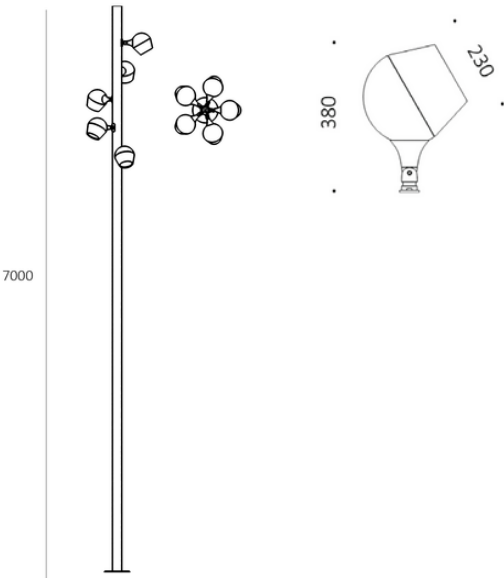

Art. No.	Watt	Lumen	CCT	Weight (kg.)	Dimensions (H) mm.	Pole Length (WxH) mm.
EUS-926-030-830	30W	3200	3000K	8,2 Kg.	4000-7000	230x380
EUS-926-030-840	30W	3450	4000K	8,2 Kg.	4000-7000	230x380
EUS-926-030-850	30W	3620	5000K	8,2 Kg.	4000-7000	230x380
EUS-926-060-830	60W	6300	3000K	13,0 kg.	4000-7000	230x380
EUS-926-060-840	60W	6500	4000K	13,0 kg.	4000-7000	230x380
EUS-926-060-850	60W	6740	5000K	13,0 kg.	4000-7000	230x380