

Terra

Wallwasher Series





FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours

Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc>0.90
 Operating Temperature: -20 / +50

Optical

Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

Kelvin Values



Technical Drawing

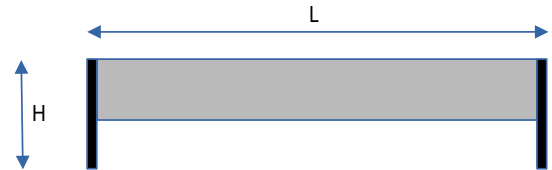

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-003-830	3W	300	3000K	52x120x60	0,3 kg.
EFS-101-003-840	3W	320	4000K	52x120x60	0,3 kg.
EFS-101-003-865	3W	340	6500K	52x120x60	0,3 kg.



FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours


Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Optical

Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

Kelvin Values



Technical Drawing

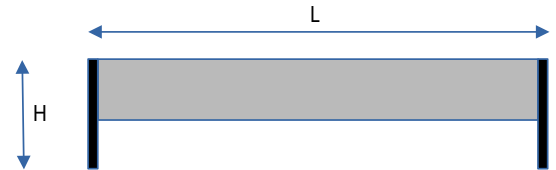

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-006-830	6W	600	3000K	52x200x60	0,5 kg.
EFS-101-006-840	6W	620	4000K	52x200x60	0,5 kg.
EFS-101-006-865	6W	640	6500K	52x200x60	0,5 kg.



FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours


Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Optical

Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

Kelvin Values



Technical Drawing

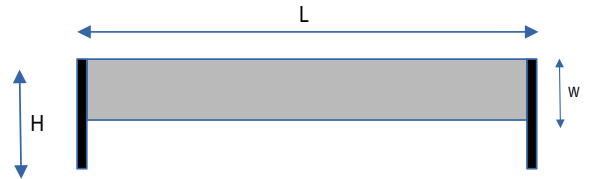

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-009-830	9W	900	3000K	52x300x60	0,7 kg.
EFS-101-009-840	9W	920	4000K	52x300x60	0,7 kg.
EFS-101-009-865	9W	940	6500K	52x300x60	0,7 kg.



FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours

Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Optical

Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

Kelvin Values



Technical Drawing

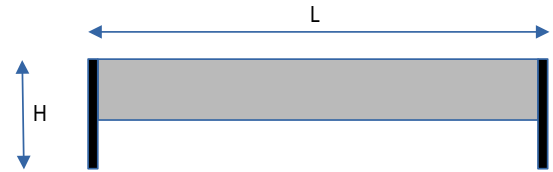

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-012-830	12W	1200	3000K	52x350x60	0,8 kg.
EFS-101-012-840	12W	1220	4000K	52x350x60	0,8 kg.
EFS-101-012-865	12W	1240	6500K	52x350x60	0,8 kg.



Specifications



FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours

Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc>0.90
 Operating Temperature: -20 / +50

Optical


Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Photometric Data

Kelvin Values



Technical Drawing

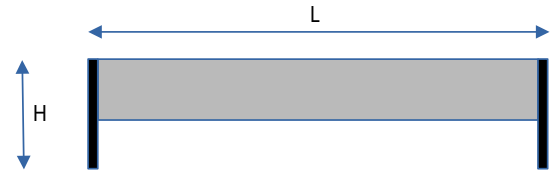

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-018-830	18W	1800	3000K	52x500x60	1,0 kg.
EFS-101-018-840	18W	1820	4000K	52x500x60	1,0 kg.
EFS-101-018-865	18W	1840	6500K	52x500x60	1,0 kg.



FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours

Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc>0.90
 Operating Temperature: -20 / +50

Optical

Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Specifications




Photometric Data

Kelvin Values



Technical Drawing

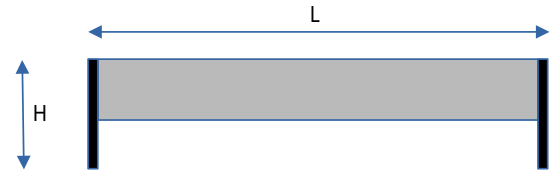

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-024-830	24W	2400	3000K	52x670x60	1,2 kg.
EFS-101-024-840	24W	2420	4000K	52x670x60	1,2 kg.
EFS-101-024-865	24W	2440	6500K	52x670x60	1,2 kg.



Specifications



FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours

Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pfc>0.90
 Operating Temperature: -20 / +50

Optical


Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Photometric Data

Kelvin Values



Technical Drawing

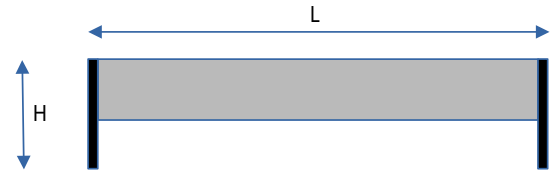

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-036-830	36W	3600	3000K	52x1000x60	1,6 kg.
EFS-101-036-840	36W	3620	4000K	52x1000x60	1,6 kg.
EFS-101-036-865	36W	3640	6500K	52x1000x60	1,6 kg.



Specifications



FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours

Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Optical


Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Photometric Data

Kelvin Values



Technical Drawing

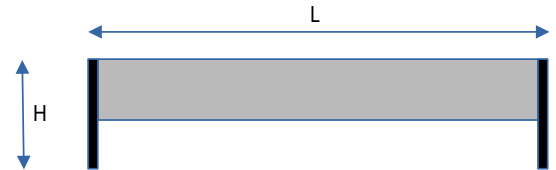

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-045-830	45W	4500	3000K	52x1200x60	1,9 kg.
EFS-101-045-840	45W	4520	4000K	52x1200x60	1,9 kg.
EFS-101-045-865	45W	4540	6500K	52x1200x60	1,9 kg.



Specifications



FEATURES

Mechanical

Body: Extruded aluminium profile
 Finish: Eloxal plated
 Installation: Surface mounted - adjustable installation mechanism
 End Caps: GRP
 Diffuser: 4 mm. tempered transparent glass
 Optics: PMMA lenses for facade lighting

Options

Narrow - wide - flood beam angles
 CRI>90
 DALI
 DMX control
 RGB
 Red - Green - Blue - Amber colours

Electrical

Driver: LED driver inside the body
 Light source: Power LED
 Number of LEDs: 4
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 P_f>0.90
 Operating Temperature: -20 / +50

Optical


Beam angle: 30 degrees
 CRI>80
 McAdams Step<3

Photometric Data

Kelvin Values



Technical Drawing

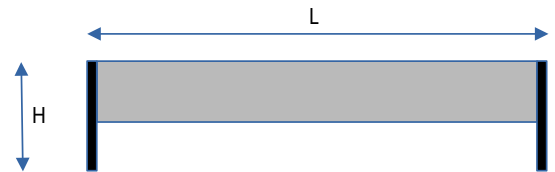

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH)mm.	Weight (kg.)
EFS-101-057-830	57W	4500	3000K	52x1500x60	2,1 kg.
EFS-101-057-840	57W	4520	4000K	52x1500x60	2,1 kg.
EFS-101-057-865	57W	4540	6500K	52x1500x60	2,1 kg.