



# Tyana

Spotlight Series



# TYANA-LI

SKU: ISS-436 Categories: [Interior](#), [Spotlight](#)

**NERA**  
LIGHT



## FEATURES

### Mechanical

Body: Aluminium  
Finish: Electrostatic powder painted  
Installation: Ceiling surface mounted  
Diffuser: Transparent safety glass  
Optics: Aluminium reflector

### Electrical

Driver: LED driver inside housing  
Light source: COB LED  
Frequency: 220-240V 50/60 Hz  
Lifetime: 50.000 hours  
Pfc>0.90  
Operating Temperature: -20 / +50


### Options

RAL selection  
CRI>90  
CRI>97  
DALI  
0-10V / 1-10V  
Casambi


### Optical

Beam angle: 15-30-45-60 degree options  
UGR: <21  
CRI>80  
McAdams Step<3

## Specifications




## Photometric Data



## CCT Values



## Technical Drawing

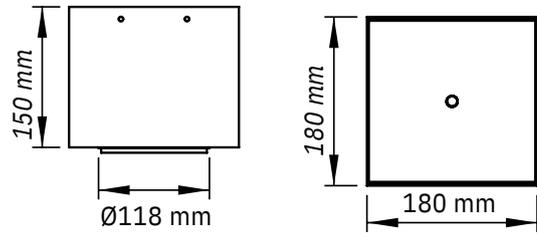

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-436-020-827	20W	2100	2700K	180x180x150	N/A	1,45 kg.
ISS-436-020-830	20W	2260	3000K	180x180x150	N/A	1,45 kg.
ISS-436-020-840	20W	2400	4000K	180x180x150	N/A	1,45 kg.
ISS-436-020-865	20W	2500	6500K	180x180x150	N/A	1,45 kg.
ISS-436-030-827	30W	3000	2700K	180x180x150	N/A	1,45 kg.
ISS-436-030-830	30W	3150	3000K	180x180x150	N/A	1,45 kg.
ISS-436-030-840	30W	3300	4000K	180x180x150	N/A	1,45 kg.
ISS-436-030-865	30W	3420	6500K	180x180x150	N/A	1,45 kg.
ISS-436-040-827	40W	4000	2700K	180x180x150	N/A	1,45 kg.
ISS-436-040-830	40W	4150	3000K	180x180x150	N/A	1,45 kg.
ISS-436-040-840	40W	4300	4000K	180x180x150	N/A	1,45 kg.
ISS-436-040-865	40W	4460	6500K	180x180x150	N/A	1,45 kg.

# TYANA-LI

SKU: ISS-437 Categories: [Interior](#), [Spotlight](#)



## FEATURES

### Mechanical

Body: Aluminium  
 Finish: Electrostatic powder painted  
 Installation: Ceiling surface mounted  
 Diffuser: Transparent safety glass  
 Optics: Aluminium reflector

### Electrical

Driver: LED driver inside housing  
 Light source: COB LED  
 Frequency: 220-240V 50/60 Hz  
 Lifetime: 50.000 hours  
 Pfc: 0.90  
 Operating Temperature: -20 / +50


### Options

RAL selection  
 CRI>90  
 CRI>97  
 DALI  
 0-10V / 1-10V  
 Casambi


### Optical

Beam angle: 15-30-45-60 degree options  
 UGR: <21  
 CRI>80  
 McAdams Step<3

## Specifications




### Photometric Data



### CCT Values



### Technical Drawing



Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-437-040-827	2x20W	4040	2700K	180x360x150	N/A	1,9 kg.
ISS-437-040-830	2x20W	4200	3000K	180x360x150	N/A	1,9 kg.
ISS-437-040-840	2x20W	4480	4000K	180x360x150	N/A	1,9 kg.
ISS-437-040-865	2x20W	4700	6500K	180x360x150	N/A	1,9 kg.
ISS-437-060-827	2x30W	6000	2700K	180x360x150	N/A	1,9 kg.
ISS-437-060-830	2x30W	6300	3000K	180x360x150	N/A	1,9 kg.
ISS-437-060-840	2x30W	6600	4000K	180x360x150	N/A	1,9 kg.
ISS-437-060-865	2x30W	6840	6500K	180x360x150	N/A	1,9 kg.
ISS-437-080-827	2x40W	4000	2700K	180x360x150	N/A	1,9 kg.
ISS-437-080-830	2x40W	4150	3000K	180x360x150	N/A	1,9 kg.
ISS-437-080-840	2x40W	4300	4000K	180x360x150	N/A	1,9 kg.
ISS-437-080-865	2x40W	4460	6500K	180x360x150	N/A	1,9 kg.

# TYANA-LI

SKU: ISS-437 Categories: [Interior](#), [Spotlight](#)

**NERA**  
LIGHT



## FEATURES

### Mechanical

Body: Aluminium  
Finish: Electrostatic powder painted  
Installation: Ceiling surface mounted  
Diffuser: Transparent safety glass  
Optics: Aluminium reflector

### Electrical

Driver: LED driver inside housing  
Light source: COB LED  
Frequency: 220-240V 50/60 Hz  
Lifetime: 50.000 hours  
Pfc: 0.90  
Operating Temperature: -20 / +50


### Options

RAL selection  
CRI>90  
CRI>97  
DALI  
0-10V / 1-10V  
Casambi


### Optical

Beam angle: 15-30-45-60 degree options  
UGR: <21  
CRI>80  
McAdams Step<3

## Specifications




### Photometric Data



### CCT Values



### Technical Drawing

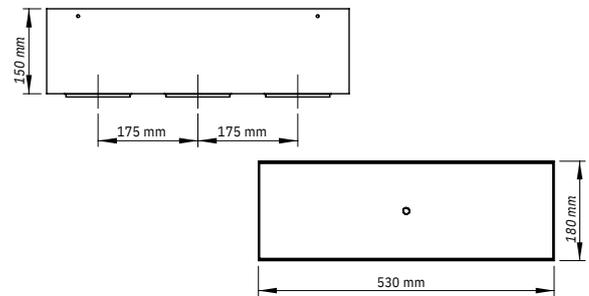

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-438-060-827	3x20W	6060	2700K	180x530x150	N/A	2,5 kg.
ISS-438-060-830	3x20W	6300	3000K	180x530x150	N/A	2,5 kg.
ISS-438-060-840	3x20W	6480	4000K	180x530x150	N/A	2,5 kg.
ISS-438-060-865	3x20W	6600	6500K	180x530x150	N/A	2,5 kg.
ISS-438-090-827	3x30W	9000	2700K	180x530x150	N/A	2,5 kg.
ISS-438-090-830	3x30W	9350	3000K	180x530x150	N/A	2,5 kg.
ISS-438-090-840	3x30W	9500	4000K	180x530x150	N/A	2,5 kg.
ISS-438-090-865	3x30W	9740	6500K	180x530x150	N/A	2,5 kg.
ISS-438-120-827	3x40W	12500	2700K	180x530x150	N/A	2,5 kg.
ISS-438-120-830	3x40W	13150	3000K	180x530x150	N/A	2,5 kg.
ISS-438-120-840	3x40W	14000	4000K	180x530x150	N/A	2,5 kg.
ISS-438-120-865	3x40W	15200	6500K	180x530x150	N/A	2,5 kg.

# TYANA-S I

SKU: ISS-439 Categories: [Interior](#), [Spotlight](#)



## FEATURES

### Mechanical

Body: Aluminium  
 Finish: Electrostatic powder painted  
 Installation: Ceiling surface mounted  
 Diffuser: Transparent safety glass  
 Optics: Aluminium reflector

### Electrical

Driver: LED driver inside housing  
 Light source: COB LED  
 Frequency: 220-240V 50/60 Hz  
 Lifetime: 50.000 hours  
 P<sub>f</sub>>0.90  
 Operating Temperature: -20 / +50


### Options

RAL selection  
 CRI>90  
 CRI>97  
 DALI  
 0-10V / 1-10V  
 Casambi


### Optical

Beam angle: 15-30-45-60 degree options  
 UGR: <21  
 CRI>80  
 McAdams Step<3


## Specifications




## Photometric Data



## CCT Values



## Technical Drawing

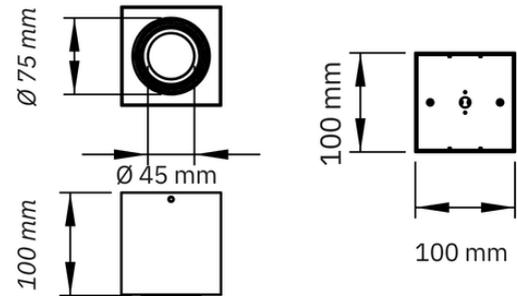

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-439-010-827	10W	1010	2700K	100x100x100	N/A	0,6 kg.
ISS-439-010-830	10W	1100	3000K	100x100x100	N/A	0,6 kg.
ISS-439-010-840	10W	1240	4000K	100x100x100	N/A	0,6 kg.
ISS-439-010-865	10W	1300	6500K	100x100x100	N/A	0,6 kg.

# TYANA-S II

SKU: ISS-440 Categories: [Interior](#), [Spotlight](#)



## FEATURES

### Mechanical

Body: Aluminium  
 Finish: Electrostatic powder painted  
 Installation: Ceiling surface mounted  
 Diffuser: Transparent safety glass  
 Optics: Aluminium reflector

### Electrical

Driver: LED driver inside housing  
 Light source: COB LED  
 Frequency: 220-240V 50/60 Hz  
 Lifetime: 50.000 hours  
 P<sub>f</sub> > 0.90  
 Operating Temperature: -20 / +50


### Options

RAL selection  
 CRI > 90  
 CRI > 97  
 DALI  
 0-10V / 1-10V  
 Casambi


### Optical

Beam angle: 15-30-45-60 degree options  
 UGR: < 21  
 CRI > 80  
 McAdams Step < 3

## Specifications




## Photometric Data



## CCT Values



## Technical Drawing

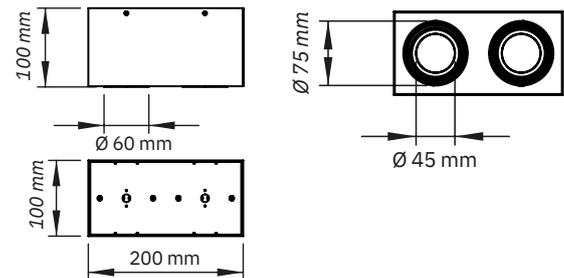

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-440-020-827	2x10W	2100	2700K	100x200x100	N/A	1,3 kg.
ISS-440-020-830	2x10W	2260	3000K	100x200x100	N/A	1,3 kg.
ISS-440-020-840	2x10W	2400	4000K	100x200x100	N/A	1,3 kg.
ISS-440-020-865	2x10W	2500	6500K	100x200x100	N/A	1,3 kg.

# TYANA-S III

SKU: ISS-441 Categories: [Interior](#), [Spotlight](#)

**NERA**  
LIGHT



## FEATURES

### Mechanical

Body: Aluminium  
Finish: Electrostatic powder painted  
Installation: Ceiling surface mounted  
Diffuser: Transparent safety glass  
Optics: Aluminium reflector

### Electrical

Driver: LED driver inside housing  
Light source: COB LED  
Frequency: 220-240V 50/60 Hz  
Lifetime: 50.000 hours  
Pf>0.90  
Operating Temperature: -20 / +50


### Options

RAL selection  
CRI>90  
CRI>97  
DALI  
0-10V / 1-10V  
Casambi


### Optical

Beam angle: 15-30-45-60 degree options  
UGR: <21  
CRI>80  
McAdams Step<3


## Specifications




## Photometric Data



## CCT Values



## Technical Drawing

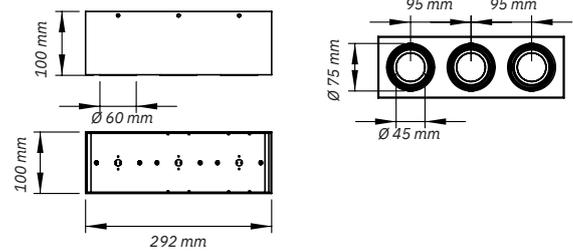

Art. No.	Watt	Lumen	CCT	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-441-030-827	3x10W	3000	2700K	100x300x100	N/A	1,9 kg.
ISS-441-030-830	3x10W	3150	3000K	100x300x100	N/A	1,9 kg.
ISS-441-030-840	3x10W	3300	4000K	100x300x100	N/A	1,9 kg.
ISS-441-030-865	3x10W	3420	6500K	100x300x100	N/A	1,9 kg.