



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent plexiglass
 Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Direct
 Beam angle: 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Options


RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit - CBS connection
 IP54-IP65 protection



Photometric Data



Technical Drawing

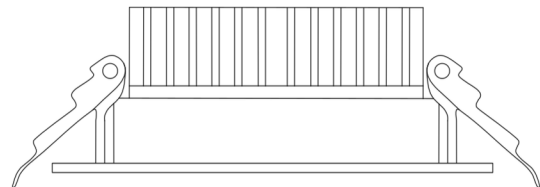

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-513-008	8W	985*	2700K-6500K	108x55	85	0,60 kg.
IDS-514-012	12W	1450*	2700K-6500K	128x55	105	0,90 kg.
IDS-515-015	15W	1750*	2700K-6500K	150x55	130	1,20 kg.
IDS-516-020	20W	2420*	2700K-6500K	180x55	160	1,40 kg.
IDS-517-025	25W	2800*	2700K-6500K	200x55	175	1,60 kg.
IDS-518-030	30W	3450*	2700K-6500K	240x55	210	2,00 kg.

Lumen values can vary according to CCT - CRI and beam angle options