

Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Opal diffuser
 Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
 Light source: SMD LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: >36.000 hours
 Operating Temperature: -20 / +50


Optical

Light effect: Direct
 Beam angle: 120 degrees
 UGR: <21
 CRI>80


Options

RAL selection
 DALI-1-10V-Phase dimming
 Emergency kit - CBS connection

Photometric Data



Technical Drawing

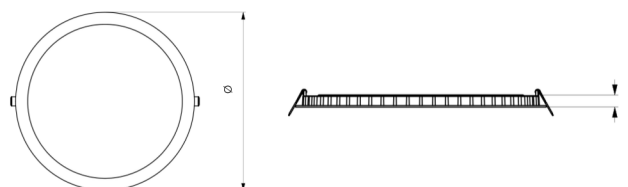

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-551-003	3W	290*	2700K-6500K	85x10	74	0,12 kg.
IDS-552-006	6W	550*	2700K-6500K	120x10	106	0,17 kg.
IDS-553-009	9W	795*	2700K-6500K	145x10	134	0,23 kg.
IDS-554-012	12W	1090*	2700K-6500K	174x10	154	0,30 kg.
IDS-555-015	15W	1410*	2700K-6500K	200x10	182	0,37 kg.
IDS-556-018	18W	1640*	2700K-6500K	225x10	205	0,48 kg.
IDS-557-024	24W	2160*	2700K-6500K	300x10	276	0,89 kg.