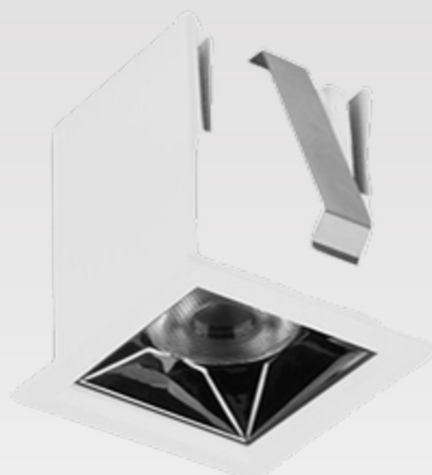


Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Silver optics
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Fixed
Beam angle: 38 degrees
UGR: <16
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control

Photometric Data

38°



Technical Drawing

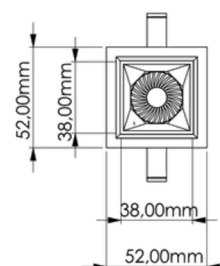

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-466-004	4W	340*	2700K-6500K	52x52x56	40x40	0,15 kg.

Lumen values can vary according to CCT - CRI and beam angle options