

SPOT LIGHTING





Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical


Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

Light effect: Fixed
Beam angle: 30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection




Photometric Data


30°



45°



Technical Drawing

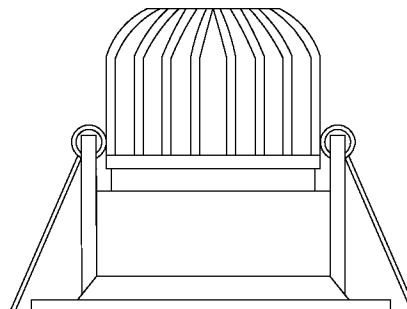

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-488-007	7W	875*	2700K-6500K	83x75	70	0,35 kg.
ISS-488-012	12W	1500*	2700K-6500K	83x75	70	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Darkoo LED lenses
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical


Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Fixed
Beam angle: 15-24-36-60 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

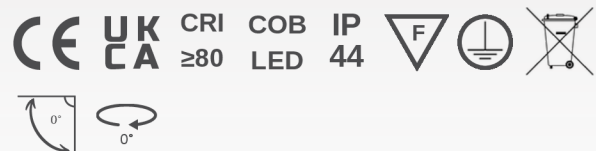

Photometric Data

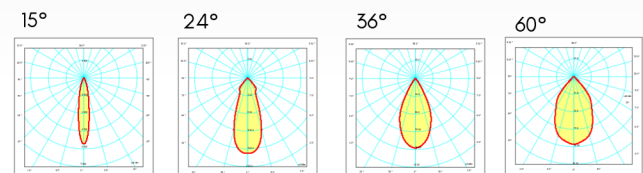


Technical Drawing

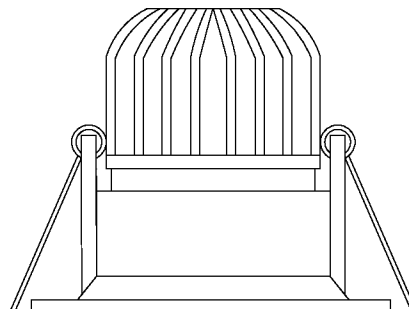

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-498-007	7W	800 *	2700K-6500K	83x75	70	0,35 kg.
ISS-498-012	12W	1420 *	2700K-6500K	83x75	70	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options

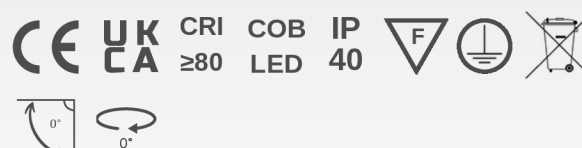

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light Effect: Fixed
Beam angle: 30-45 degrees
UGR: <19
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data




Technical Drawing

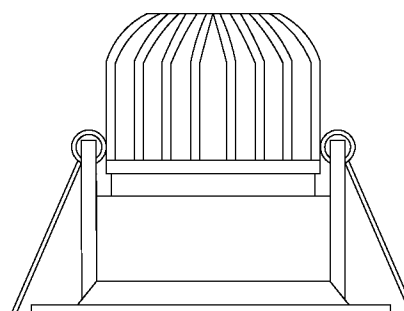

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-487-007	7W	875*	2700K-6500K	83x75	70	0,35 kg.
ISS-487-012	12W	1500*	2700K-6500K	83x75	70	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options

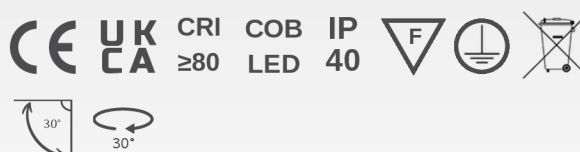


Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent safety glass
 Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Photometric Data




Optical

Light effect: Directional
 Beam angle: 30-45 degrees
 UGR: <19
 CRI>80
 McAdams Step<3

Options


RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit / CBS connection

Technical Drawing

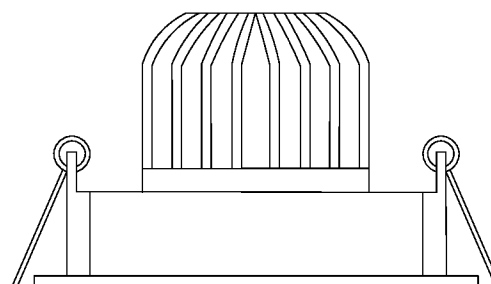

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-486-007	7W	875*	2700K-6500K	97x75	85	0,40 kg.
ISS-486-012	12W	1500*	2700K-6500K	97x75	85	0,40 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Darkoo LED lenses
 Diffuser: Transparent safety glass
 Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Optical

Light effect: Directional
 Beam angle: 15-24-36-60 degrees
 UGR: <19
 CRI>80
 McAdams Step<3


Options

RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit / CBS connection
 Lens & Reflector

Photometric Data

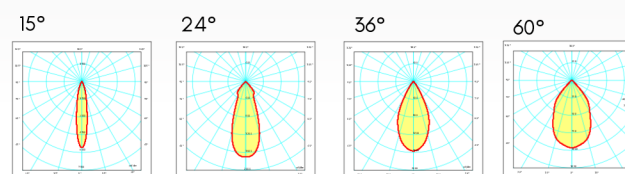

Technical Drawing

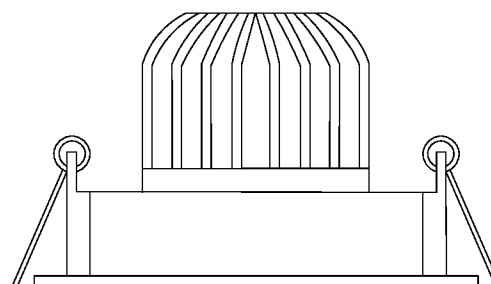

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-485-008	8W	800 *	2700K-6500K	108x43	90	0,40 kg.
ISS-485-010	10W	1250 *	2700K-6500K	108x43	90	0,40 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical


Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Fixed
Beam angle: 30-45 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection



Photometric Data



Technical Drawing

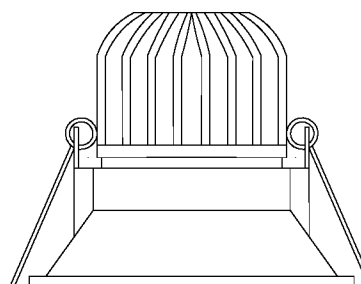

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-483-007	7W	875*	2700K-6500K	97x75	70	0,35 kg.
ISS-483-012	12W	1500*	2700K-6500K	97x75	70	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Darkoo LED lenses
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical


Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Fixed
Beam angle: 15-24-36-60 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

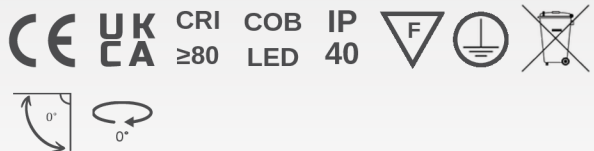

Photometric Data

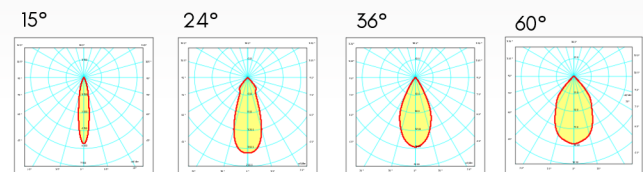

Technical Drawing

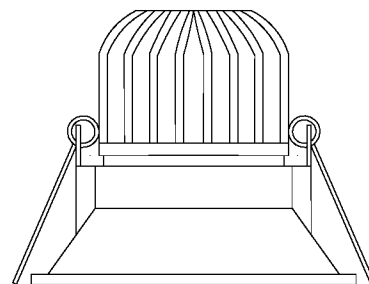


Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-483-007	7W	800*	2700K-6500K	97x75	70	0,35 kg.
ISS-483-012	12W	1500*	2700K-6500K	97x75	70	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options

TRIA IP65

Categories: Interior, Spotlights

NERA
LIGHT

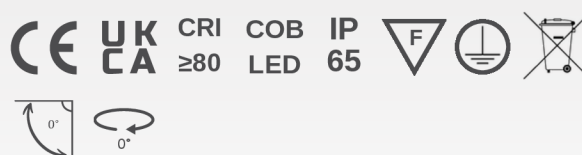

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Fixed
Beam angle: 30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data



Technical Drawing

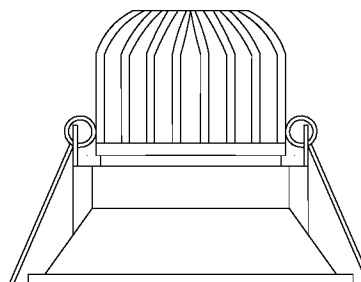

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-482-007	7W	875*	2700K-6500K	83x75	70	0,35 kg.
ISS-482-012	12W	1500*	2700K-6500K	83x75	70	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Darkoo LED lenses
 Diffuser: Transparent safety glass
 Installation: Ceiling recessed mounted

Electrical

Driver: IP65 LED driver
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: >50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Fixed
 Beam angle: 15-24-36-60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Options


RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit / CBS connection



Photometric Data

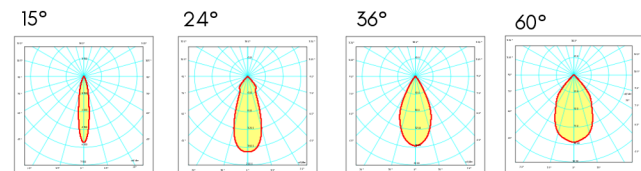

Technical Drawing

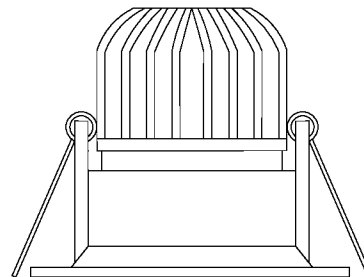

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-450-008	8W	960 *	2700K-6500K	60x65	55	0,25 kg.
ISS-451-012	12W	1500 *	2700K-6500K	80x75	75	0,40 kg.
ISS-452-015	15W	1875 *	2700K-6500K	104x95	90	0,55 kg.



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Darkoo LED lenses
Diffuser: Transparent safety glass
Installation: Trimless recessed mounted

Electrical


Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Directional
Beam angle: 15-24-36 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

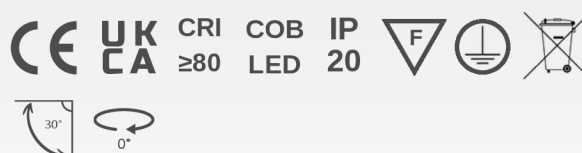

Photometric Data

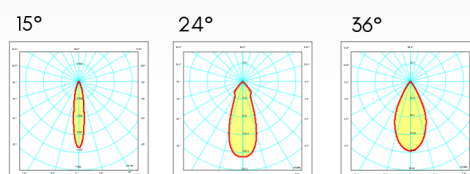


Technical Drawing

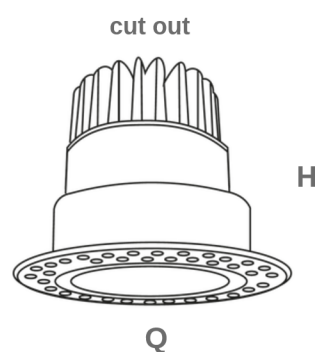

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-490-007	5W	760*	2700K-6500K	84x80	55	0,35 kg.
ISS-490-010	8W	1105*	2700K-6500K	100x100	75	0,45 kg.

Lumen values can vary according to CCT - CRI and beam angle options

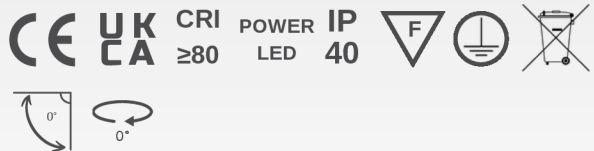

Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Singel lenses
 Diffuser: Transparent safety glass
 Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
 Light source: Mid Power LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Optical

Light effect: Fixed
 Beam angle: 15-24 degrees
 UGR: <21
 CRI>80
 McAdams Step<3


Options

RAL selection
 CRI>90
 DALI-I-10V-Phase dimming
 Casambi - Bluetooth control

Photometric Data




Technical Drawing

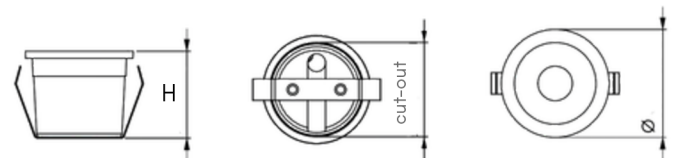

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-469-002	2W	140 *	2700K-6500K	31x25	27,5	0,10 kg.
ISS-470-003	3W	210 *	2700K-6500K	44x25	35	0,12 kg.

Lumen values can vary according to CCT - CRI and beam angle options

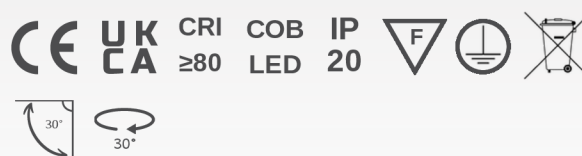

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <19
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

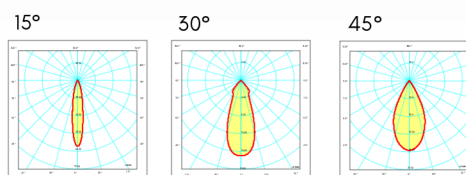


Technical Drawing

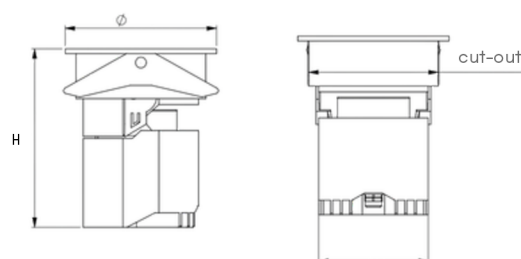

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-460-008	8W	900*	2700K-6500K	62x80	55	0,30 kg.
ISS-461-012	12W	1280*	2700K-6500K	84x101	75	0,4 kg.
ISS-462-020	20W	2280*	2700K-6500K	105x122	92	0,5 kg.

Lumen values can vary according to CCT - CRI and beam angle options

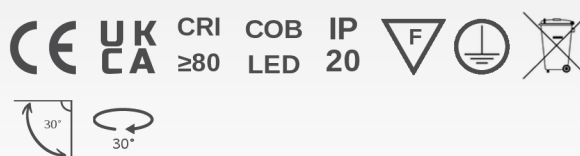

Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent safety glass
 Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Optical

Light effect: Directional
 Beam angle: 15-30-45 degrees
 UGR: <19
 CRI>80
 McAdams Step<3


Options

RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit / CBS connection

Photometric Data


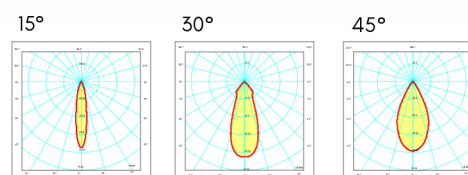


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-463-008	8W	900*	2700K-6500K	63x63x88	58x58	0,40 kg.
ISS-464-012	12W	1280*	2700K-6500K	84x84x111	78x78	0,50 kg.
ISS-465-020	20W	2280*	2700K-6500K	105x105x137	98x98	0,7 kg.

Lumen values can vary according to CCT - CRI and beam angle options

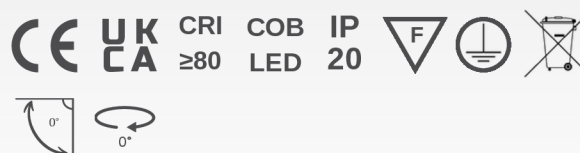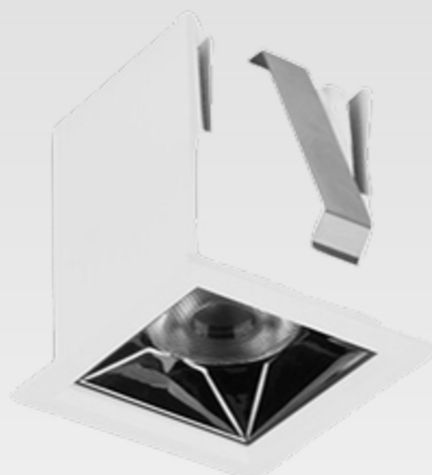

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Silver optics
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Fixed
Beam angle: 38 degrees
UGR: <16
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control

Photometric Data

38°




Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-466-004	4W	340*	2700K-6500K	52x52x56	40x40	0,15 kg.

Lumen values can vary according to CCT - CRI and beam angle options

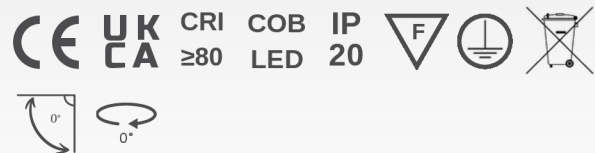

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Silver optics
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Fixed
Beam angle: 38 degrees
UGR: <16
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control

Photometric Data

38°





Technical Drawing

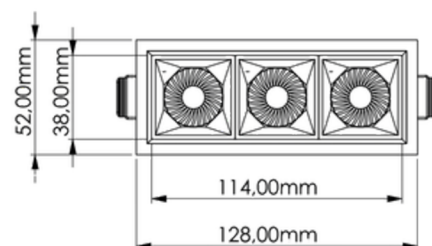

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-467-012	12W	1010 *	2700K-6500K	52x128x56	40x120	0,25 kg.

Lumen values can vary according to CCT - CRI and beam angle options

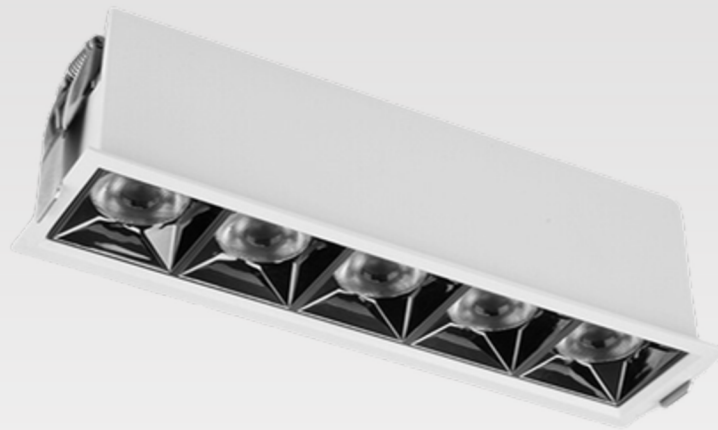

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Silver optics
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Fixed
Beam angle: 38 degrees
UGR: <16
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control

Photometric Data

38°




Technical Drawing

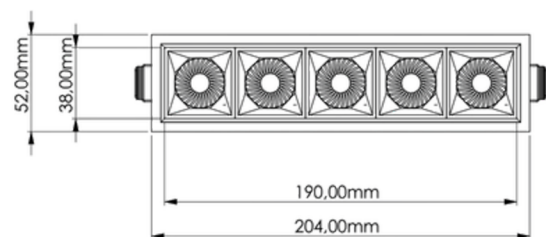

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-468-020	20W	1800*	2700K-6500K	52x204x56	40x195	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options

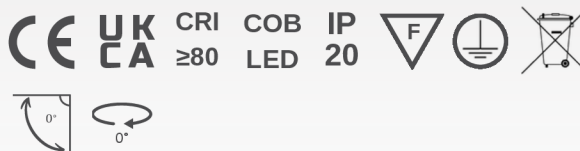

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Silver optics
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Fixed
Beam angle: 38 degrees
UGR: <16
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control

Photometric Data

38°




Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-470-016	16W	1600 *	2700K-6500K	90x90x56	85x85	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options

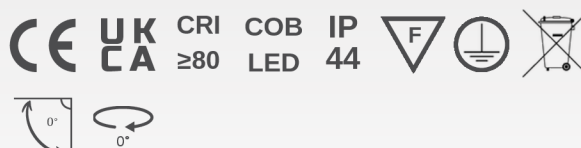

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Fixed
Beam angle: 30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data




Technical Drawing

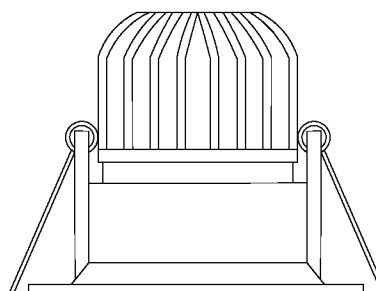

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-481-007	7W	875*	2700K-6500K	83x83x75	70x70	0,35 kg.
ISS-481-012	12W	1500*	2700K-6500K	83x83x75	70x70	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent safety glass
 Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Optical

Light effect: Directional
 Beam angle: 30-45 degrees
 UGR: <21
 CRI>80
 McAdams Step<3


Options

RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit / CBS connection

Photometric Data



Technical Drawing

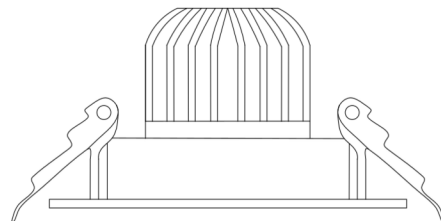

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-480-007	7W	875*	2700K-6500K	97x97x75	85x85	0,35 kg.
ISS-480-012	12W	1500*	2700K-6500K	97x97x75	85x85	0,35 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent safety glass
 Installation: Ceiling recessed mounted

Electrical


Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Directional
 Beam angle: 15-30-45 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Options


RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit / CBS connection

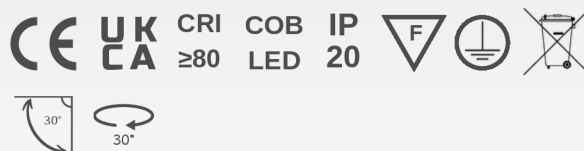

Photometric Data

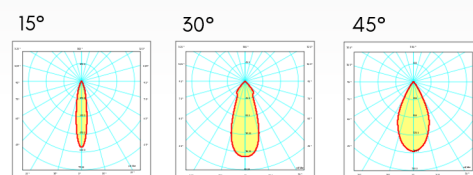


Technical Drawing

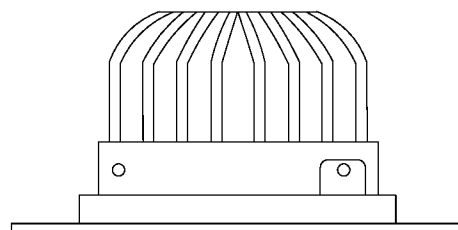

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-410-010	10W	1230*	2700K-6500K	125x125x63	100x100	0,6 kg.

Lumen values can vary according to CCT - CRI and beam angle options

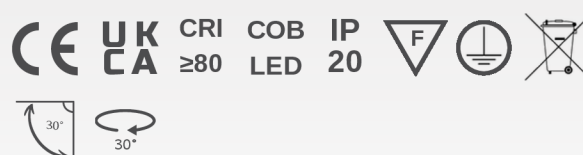

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

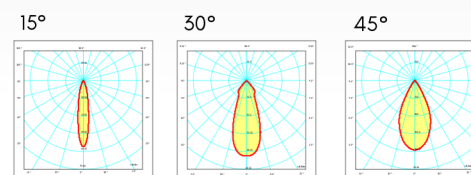

Technical Drawing

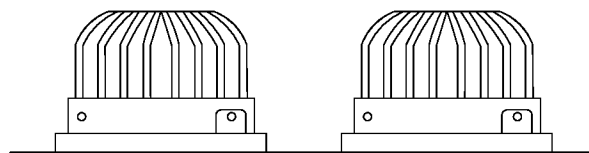


Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-411-020	2x10W	2460*	2700K-6500K	125x210x63	100x190	1,10 kg.

Lumen values can vary according to CCT - CRI and beam angle options

PARIS S III

Categories: Interior, Spotlights

NERA
LIGHT



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

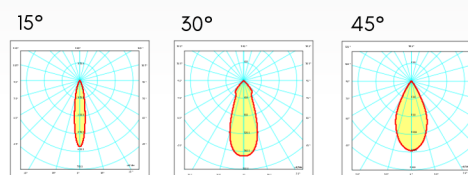


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-412-030	3x10W	3690 *	2700K-6500K	125x300x63	100x280	1,60 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

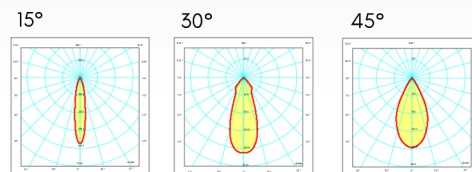


Technical Drawing

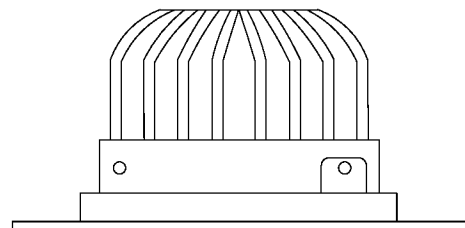

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-407-015	15W	1730*	2700K-6500K	140x140x87	120x120	1,10 kg.
ISS-407-020	20W	2350*	2700K-6500K	140x140x87	120x120	1,10 kg.

Lumen values can vary according to CCT - CRI and beam angle options

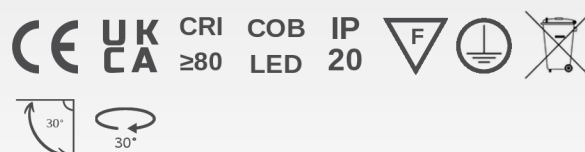

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

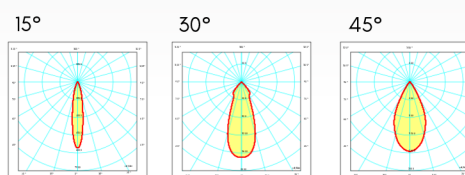

Technical Drawing

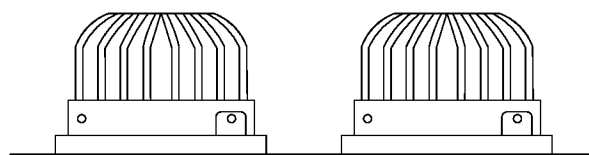


Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-408-030	2x15W	3460*	2700K-6500K	140x260x87	120x240	2,00 kg.
ISS-408-040	2x20W	4700*	2700K-6500K	140x260x87	120x240	2,00 kg.

Lumen values can vary according to CCT - CRI and beam angle options

PARIS M III

Categories: Interior, Spotlights

NERA
LIGHT



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

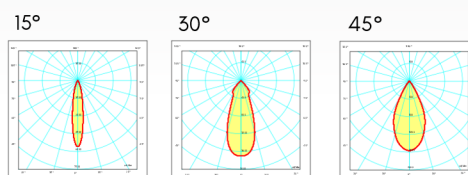


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-409-045	3x15W	5190 *	2700K-6500K	140x400x87	120x380	3,20 kg.
ISS-409-060	3x20W	7050 *	2700K-6500K	140x400x87	120x380	3,20 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

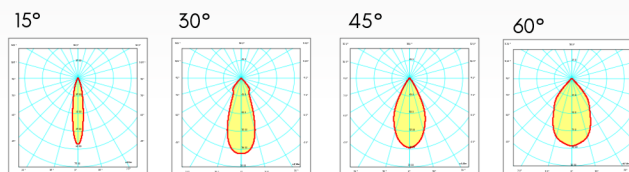

Technical Drawing

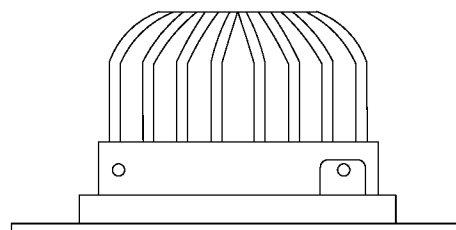


Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-404-030	30W	3320*	2700K-6500K	185x185x107	170x170	1,40 kg.
ISS-404-038	38W	4090*	2700K-6500K	185x185x107	170x170	1,40 kg.

Lumen values can vary according to CCT - CRI and beam angle options

PARIS L II

Categories: Interior, Spotlights

NERA
LIGHT

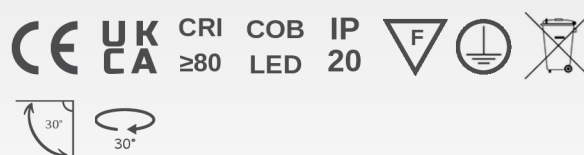

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

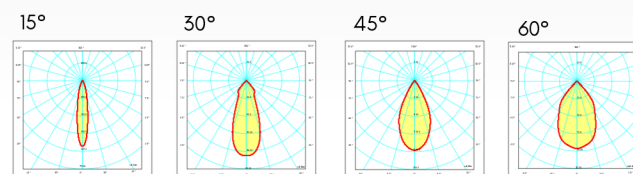

Technical Drawing

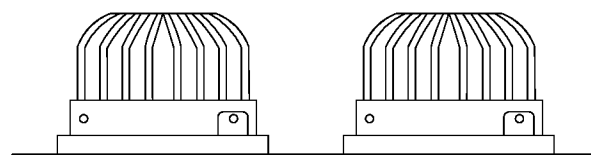


Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-405-060	2x30W	6640 *	2700K-6500K	185x360x107	170x330	2,70 kg.
ISS-405-076	2x38W	8180 *	2700K-6500K	185x360x107	170x330	2,70 kg.

Lumen values can vary according to CCT - CRI and beam angle options

PARIS L III

Categories: Interior, Spotlights

NERA
LIGHT

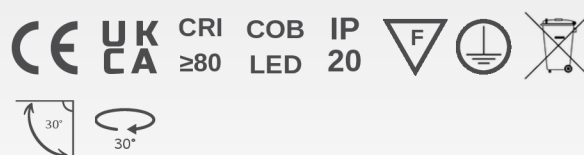

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

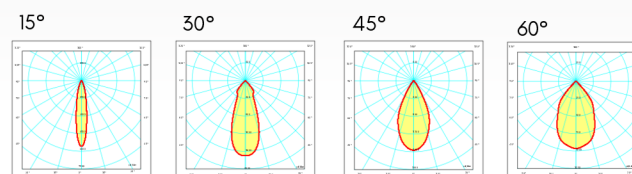


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-405-060	3x30W	9960*	2700K-6500K	185x360x107	170x330	2,70 kg.
ISS-405-076	3x38W	12270*	2700K-6500K	185x360x107	170x330	2,70 kg.

Lumen values can vary according to CCT - CRI and beam angle options

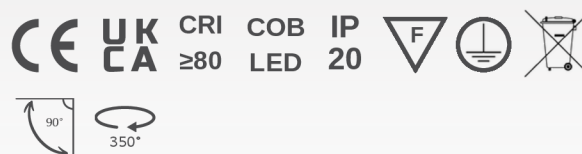

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Darkoo LED lenses
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 30-60 degrees
UGR: <21
CRI>80
MacAdams Step<3


Options

RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data




Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-423-007	7W	750*	2700K-6500K	62x86	55	0,40 kg.

Lumen values can vary according to CCT - CRI and beam angle options

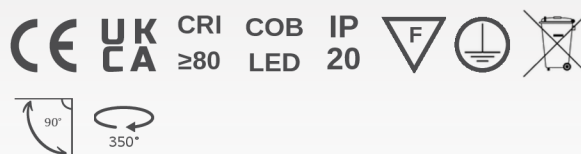

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Darkoo LED lenses
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 30-60 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data



Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-424-012	12W	1340 *	2700K-6500K	84x104	75	0,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options



FEATURES

Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Darkoo LED lenses
 Diffuser: Transparent safety glass
 Installation: Ceiling recessed mounted

Electrical


Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Directional
 Beam angle: 30-60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Options


RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit / CBS connection

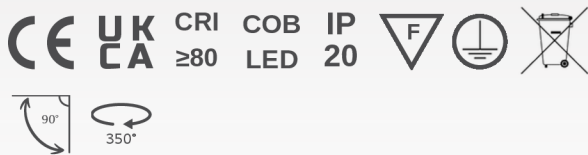

Photometric Data



Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-425-020	20W	2500*	2700K-6500K	105x128	95	0,65 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical


Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Directional
Beam angle: 15-30 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

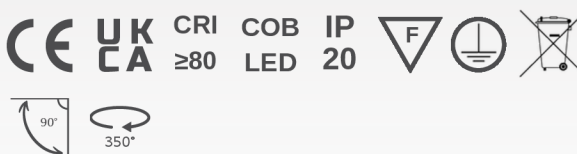

Photometric Data




Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-415-010	10W	1250 *	2700K-6500K	115x85	100	0,40 kg.

Lumen values can vary according to CCT - CRI and beam angle options

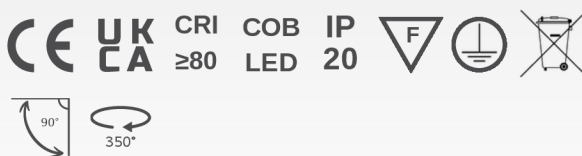

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

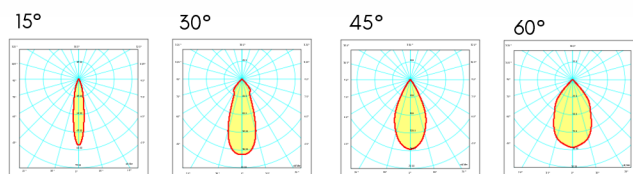


Technical Drawing

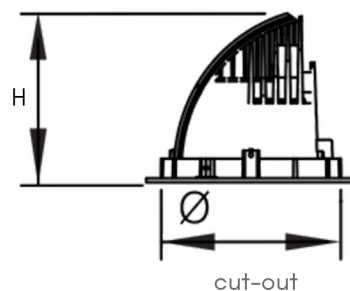

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-414-020	20W	2500*	2700K-6500K	153x125	145	0,90 kg.
ISS-414-030	30W	3300*	2700K-6500K	153x125	145	0,90 kg.

Lumen values can vary according to CCT - CRI and beam angle options

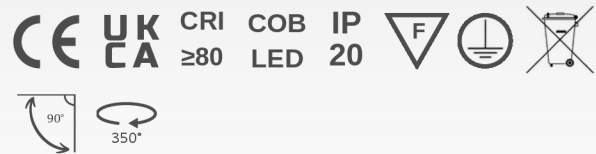

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
MacAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit / CBS connection

Photometric Data

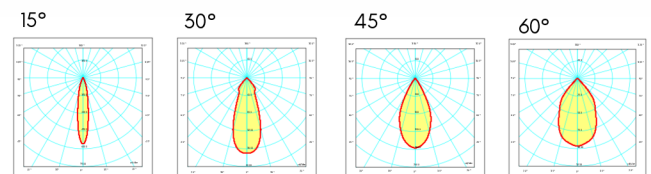


Technical Drawing

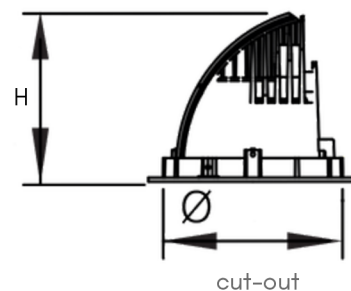

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-413-030	30W	3300*	2700K-6500K	185x146	170	1,20 kg.
ISS-413-040	40W	4500*	2700K-6500K	185x146	170	1,20 kg.

Lumen values can vary according to CCT - CRI and beam angle options

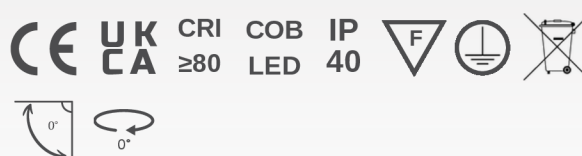

Mechanical

Body : Aluminium

Finish: Electrostatic powder paint

Optics: Aluminium reflector & dark louver

Diffuser: Transparent safety glass

Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body

Light source: COB LED

Frequency: 220-240V 50/60 Hz

Lifetime: 50.000 hours

Pf>0.90

Operating Temperature: -20 / +50

Optical

Light effect: Fixed

Beam angle: 15-30-45 degrees

UGR: <21

CRI>80

McAdams Step<3

Options


RAL selection

CRI>90


Casambi - Bluetooth control

Suspension kit

Photometric Data

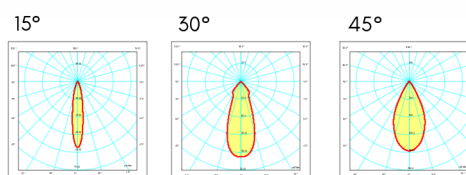


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-443-007	7W	875*	2700K-6500K	85x162	N/A	0,50 kg.
ISS-443-010	10W	1250*	2700K-6500K	85x162	N/A	0,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector & dark louver
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Fixed
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data


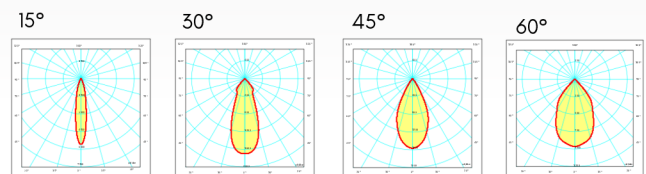


Technical Drawing

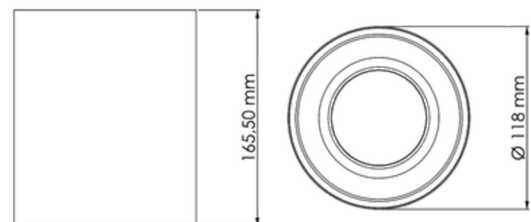

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-444-015	15W	1875*	2700K-6500K	118x165	N/A	0,90 kg.
ISS-444-020	20W	2500*	2700K-6500K	118x165	N/A	0,90 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium

Finish: Electrostatic powder paint

Optics: Aluminium reflector & dark louver

Diffuser: Transparent safety glass

Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body

Light source: COB LED

Frequency: 220-240V 50/60 Hz

Lifetime: 50.000 hours

Pf>0.90

Operating Temperature: -20 / +50

Optical

Light effect: Fixed

Beam angle: 15-30-45-60 degrees

UGR: <21

CRI>80

McAdams Step<3

Options

RAL selection


CRI>90

DALI-1-10V-Phase dimming


Casambi - Bluetooth control

Suspension kit

Photometric Data

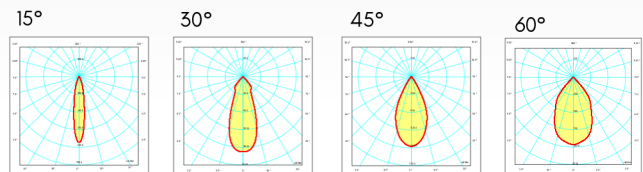


Technical Drawing

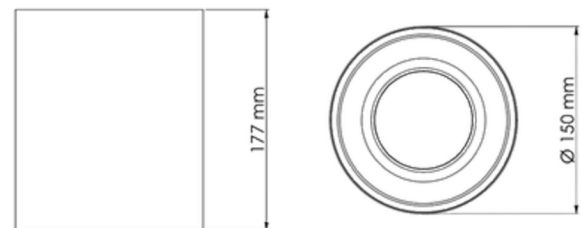

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-445-030	30W	3450*	2700K-6500K	150x177	N/A	1,30 kg.
ISS-445-040	40W	4700*	2700K-6500K	150x177	N/A	1,30 kg.

Lumen values can vary according to CCT - CRI and beam angle options

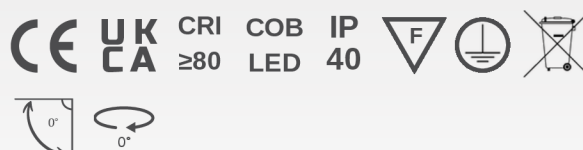

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Fixed
Beam angle: 15-30 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data




Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-435-007	7W	875*	2700K-6500K	60x165	N/A	0,30 kg.
ISS-435-010	10W	1250*	2700K-6500K	60x165	N/A	0,30 kg.

Lumen values can vary according to CCT - CRI and beam angle options

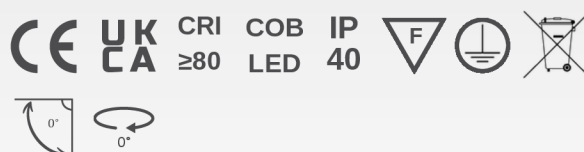

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Fixed
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data

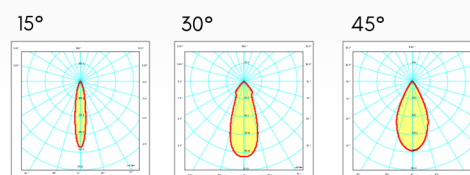


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-434-015	15W	1875*	2700K-6500K	85x210	N/A	0,50 kg.
ISS-434-020	20W	2500*	2700K-6500K	85x210	N/A	0,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options

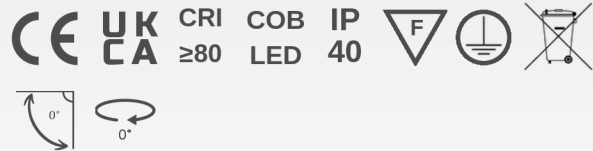

Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent safety glass
 Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Optical

Light effect: Fixed
 Beam angle: 15-30-45-60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3


Options

RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Suspension kit

Photometric Data

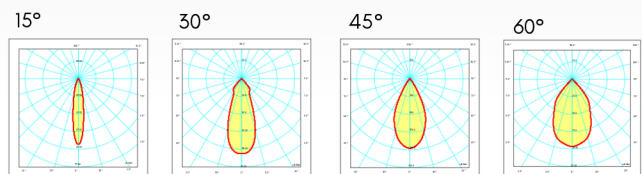


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-433-020	20W	2500*	2700K-6500K	100x230	N/A	0,75 kg.
ISS-433-030	30W	3450*	2700K-6500K	100x230	N/A	0,75 kg.

Lumen values can vary according to CCT - CRI and beam angle options

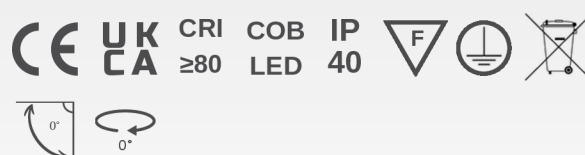

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Fixed
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-I-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data

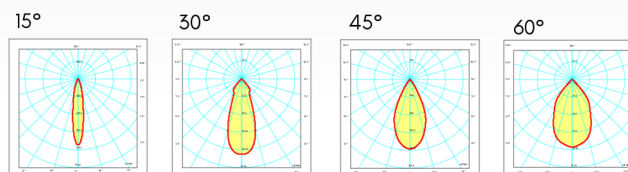


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-432-030	30W	3450*	2700K-6500K	118x230	N/A	0,9 kg.
ISS-432-040	40W	4700*	2700K-6500K	118x230	N/A	0,9 kg.

Lumen values can vary according to CCT - CRI and beam angle options

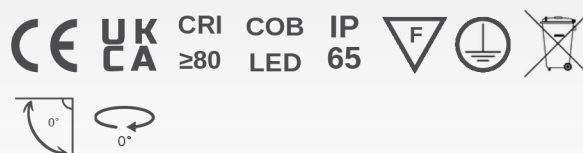

Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent safety glass
 Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Optical

Light effect: Fixed
 Beam angle: 15-30-45-60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3


Options

RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Suspension kit

Photometric Data

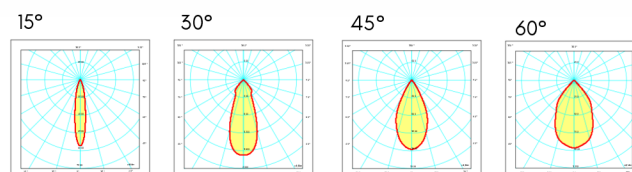


Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-475-020	20W	2400*	2700K-6500K	110x200	N/A	1,2 kg.

Lumen values can vary according to CCT - CRI and beam angle options

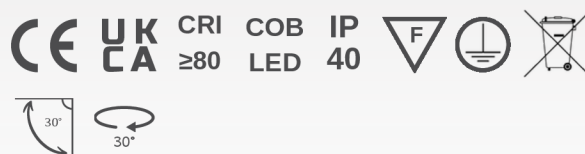

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data

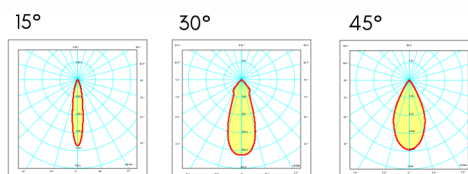


Technical Drawing

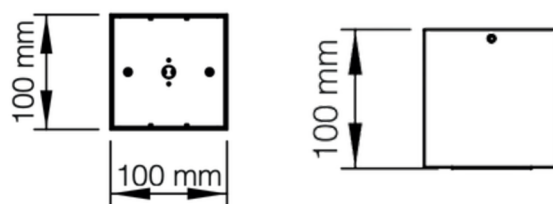

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-439-007	7W	875*	2700K-6500K	100x100x100	N/A	0,4 kg.
ISS-439-010	10W	1250*	2700K-6500K	100x100x100	N/A	0,4 kg.

Lumen values can vary according to CCT - CRI and beam angle options

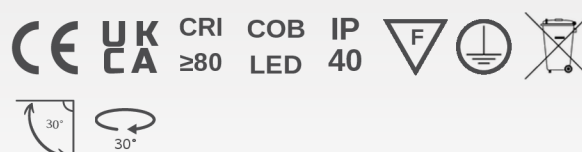

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light Effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data

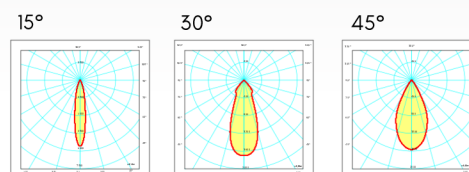


Technical Drawing

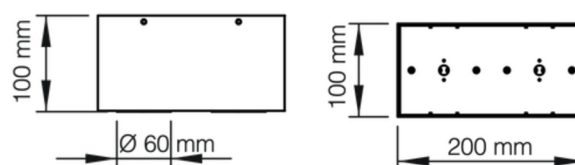

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-440-014	2x7W	1750*	2700K-6500K	100x200x100	N/A	0,65 kg.
ISS-440-020	2x10W	2500*	2700K-6500K	100x200x100	N/A	0,65 kg.

Lumen values can vary according to CCT - CRI and beam angle options

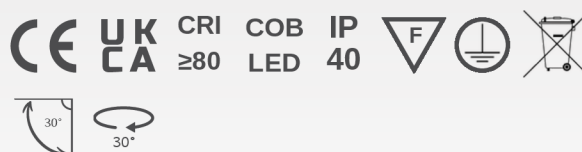

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data

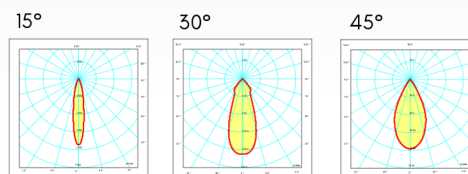

Technical Drawing

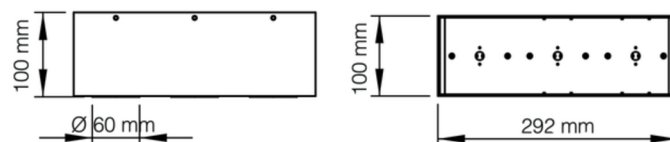

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-441-021	3x7W	2625*	2700K-6500K	100x292x100	N/A	1,00 kg.
ISS-441-030	3x10W	3750*	2700K-6500K	100x292x100	N/A	1,00 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical


Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

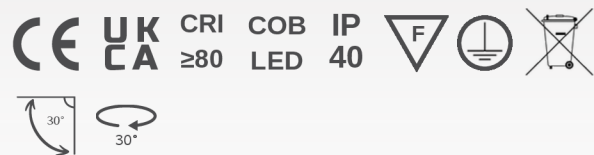

Photometric Data

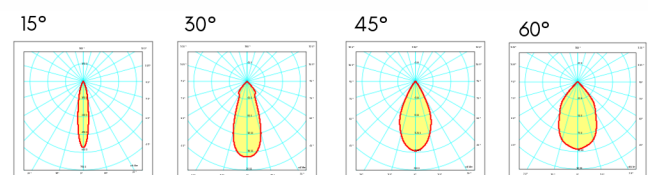


Technical Drawing

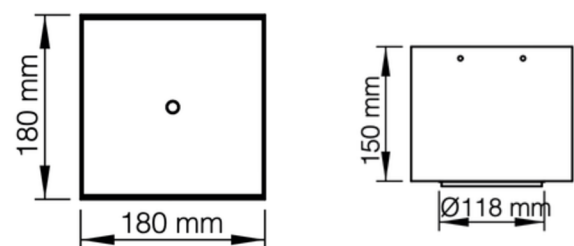

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-436-020	20W	2500*	2700K-6500K	180x180x150	N/A	2,50 kg.
ISS-436-030	30W	3450*	2700K-6500K	180x180x150	N/A	2,50 kg.
ISS-436-040	40W	4700*	2700K-6500K	180x180x150	N/A	2,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options

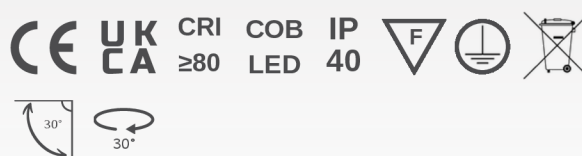

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data


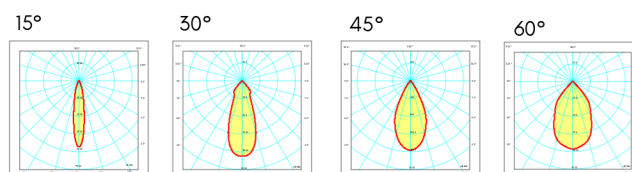


Technical Drawing

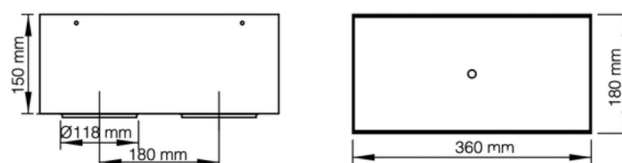

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-437-040	2x20W	5000*	2700K-6500K	180x360x150	N/A	5,00 kg.
ISS-437-060	2x30W	6900*	2700K-6500K	180x360x150	N/A	5,00 kg.
ISS-437-080	2x40W	9400*	2700K-6500K	180x360x150	N/A	5,00 kg.

Lumen values can vary according to CCT - CRI and beam angle options

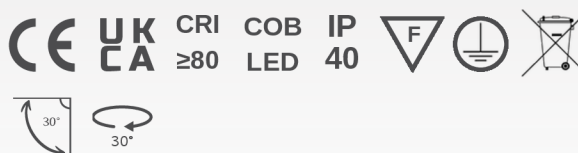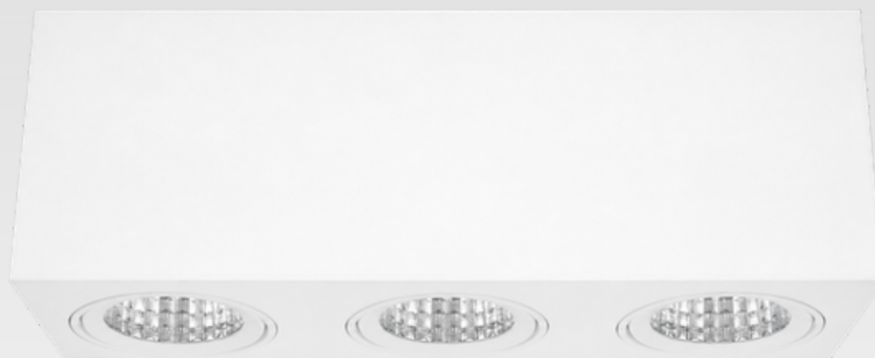

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3

Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data

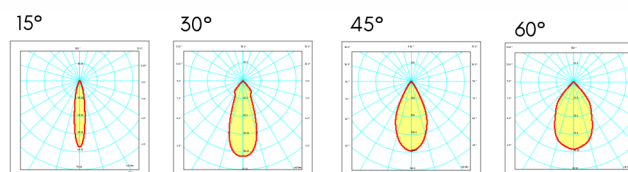

Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-438-060	3x20W	7500*	2700K-6500K	180x530x150	N/A	7,50 kg.
ISS-438-090	3x30W	10350*	2700K-6500K	180x530x150	N/A	7,50 kg.
ISS-438-120	3x40W	14100*	2700K-6500K	180x530x150	N/A	7,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options