TYANA L II

Categories: Interior, Spotlights

CE UK CA CRI ≥80 COB LED IP 40

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

Light effect: Directional
Beam angle: 15-30-45-60 degrees
UGR: <21
CRI>80
McAdams Step<3

Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data

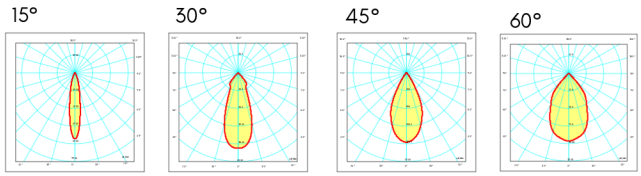

Technical Drawing

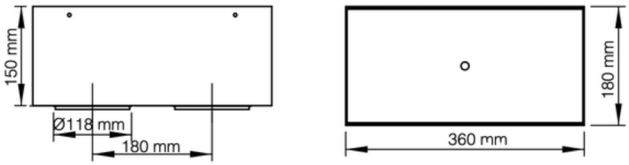

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-437-040	2x20W	5000*	2700K-6500K	180x360x150	N/A	5,00 kg.
ISS-437-060	2x30W	6900*	2700K-6500K	180x360x150	N/A	5,00 kg.
ISS-437-080	2x40W	9400*	2700K-6500K	180x360x150	N/A	5,00 kg.

Lumen values can vary according to CCT - CRI and beam angle options