TYANA S III

Categories: Interior, Spotlights

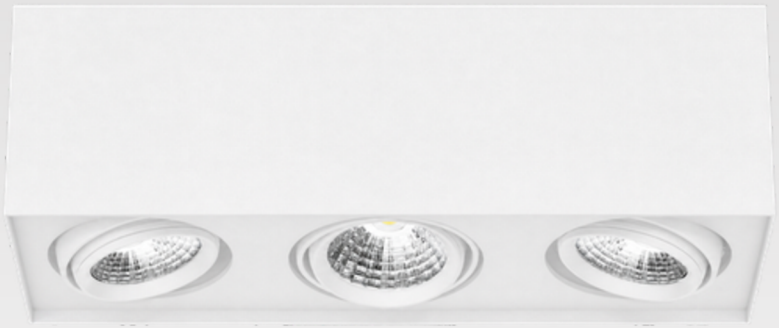

CRI ≥80 | COB LED | IP 40

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent safety glass
Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

Light effect: Directional
Beam angle: 15-30-45 degrees
UGR: <21
CRI>80
McAdams Step<3

Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Suspension kit

Photometric Data

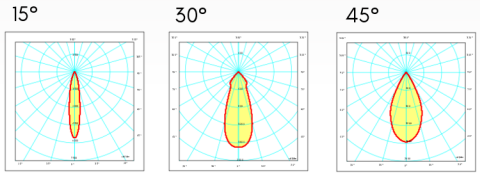

Technical Drawing

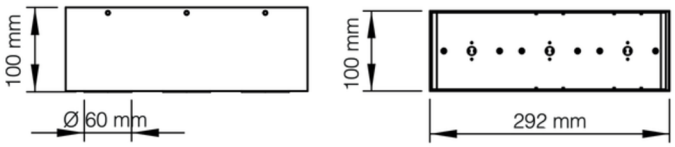

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-441-021	3x7W	2625*	2700K-6500K	100x292x100	N/A	1,00 kg.
ISS-441-030	3x10W	3750*	2700K-6500K	100x292x100	N/A	1,00 kg.

Lumen values can vary according to CCT - CRI and beam angle options