


TECHNICAL LIGHTING



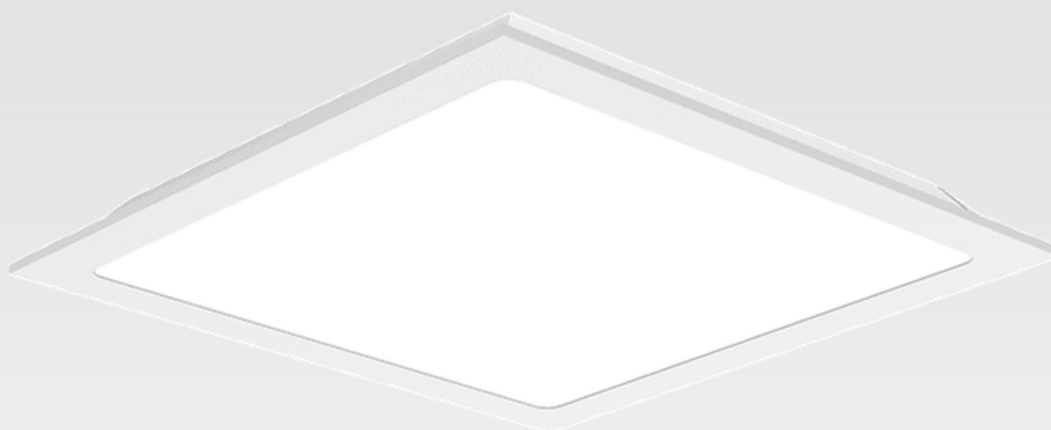

Mechanical

Body : Metal sheet
Frame: Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection
Gypsum, lay-in or metal ceiling installation
IP44-IP54



Photometric Data





Technical Drawing

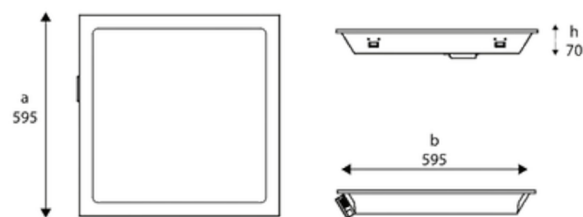

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-904-036	36W	4140*	2700K-6500K	595x595x70	575x575	2,20 kg.
ITS-904-028	28W	3200*	2700K-6500K	595x595x70	575x575	2,20 kg.

Lumen values can vary according to CCT - CRI and beam angle options

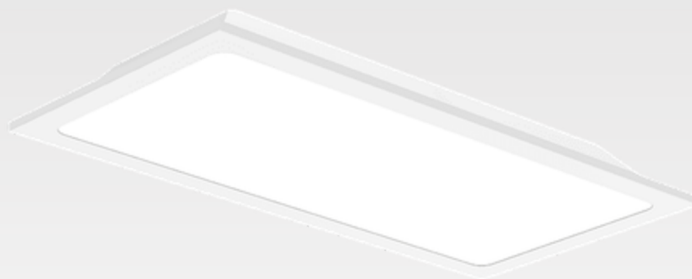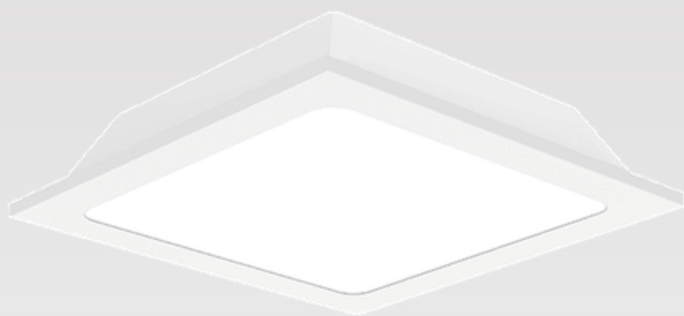

Mechanical

Body : Metal sheet
Frame: Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection
Gypsum, lay-in or metal ceiling installation
IP44-IP54



Photometric Data



Technical Drawing

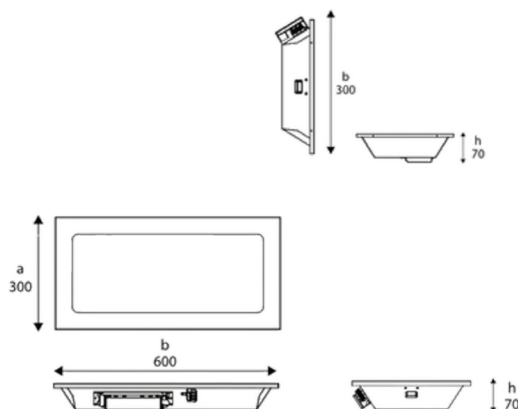

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-901-015	15W	1700 *	2700K-6500K	295x295x70	275x275	1,00 kg.
ITS-902-023	23W	2450 *	2700K-6500K	295x595x70	275x575	1,80 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Metal sheet
Frame: Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection
Gypsum, lay-in or metal ceiling installation
IP44-IP54



Photometric Data




Technical Drawing

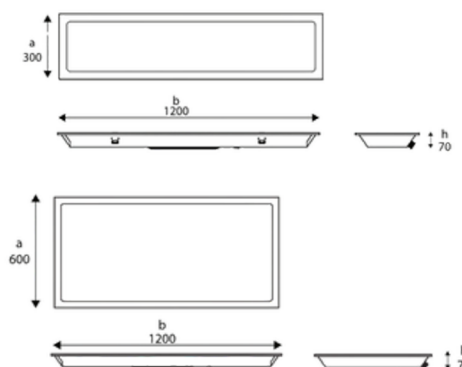

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-903-036	36W	4140*	2700K-6500K	295x1195x70	275x1175	2,20 kg.
ITS-905-080	80W	9200*	2700K-6500K	595x1195x70	575x1175	3,60 kg.

Lumen values can vary according to CCT - CRI and beam angle options

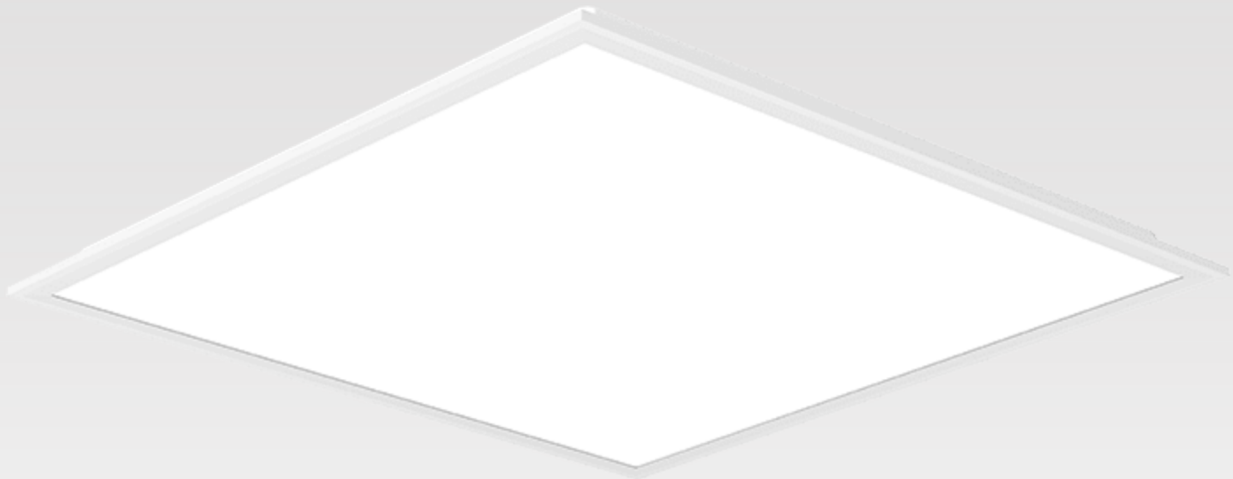

Mechanical

Body : Metal sheet
Frame: Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
DALI-1-10V-Phase dimming
Emergency kit - CBS connection
Gypsum, lay-in or metal ceiling installation



Photometric Data



Technical Drawing

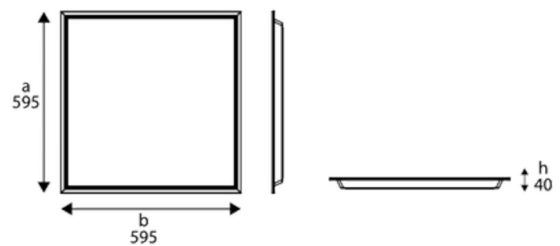

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-908-034	34W	4100*	2700K-6500K	595x595x40	575x575	1,0 kg.
ITS-908-048	48W	5780*	2700K-6500K	595x1195x40	575x575	1,5 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Metal sheet
Frame: Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
DALI-1-10V-Phase dimming
Emergency kit - CBS connection
Gypsum, lay-in or metal ceiling installation



Photometric Data




Technical Drawing

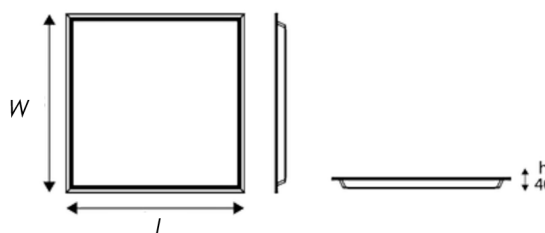

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-906-018	18W	1800*	2700K-6500K	295x295x40	275x275	0,50 kg.
ITS-907-045	45W	4600*	2700K-6500K	295x1195x40	275x1175	1,00 kg.
ITS-909-080	80W	8150*	2700K-6500K	595x1195x40	575x1175	2,10 kg.

Lumen values can vary according to CCT - CRI and beam angle options

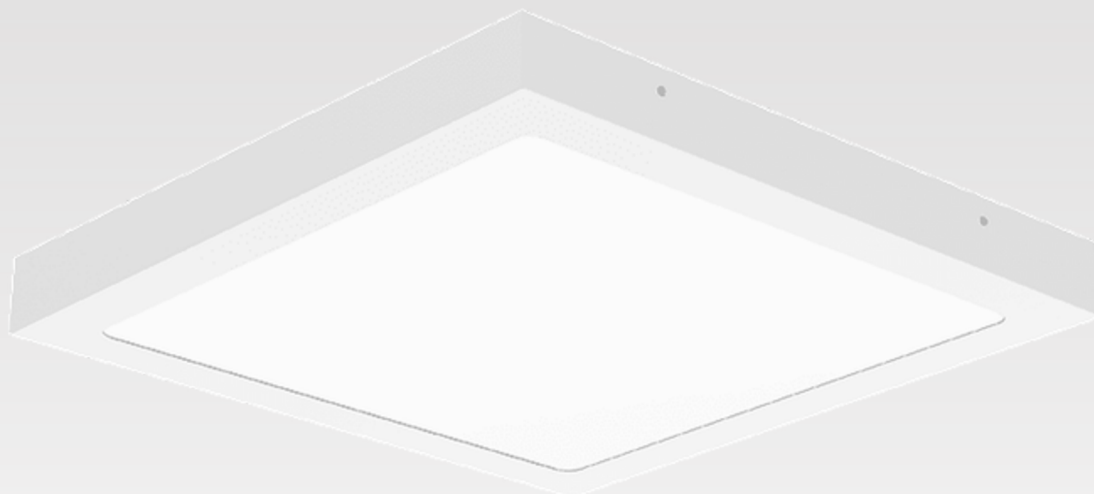

Mechanical

Body : Metal sheet
Frame: Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Surface mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection
IP44-IP54



Photometric Data





Technical Drawing

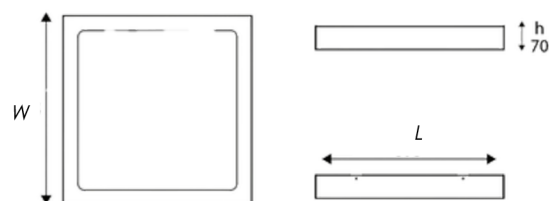

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-953-036	36W	4140 *	2700K-6500K	600x600x70	N/A	2,50 kg.
ITS-953-028	28W	3200 *	2700K-6500K	600x600x70	N/A	2,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options

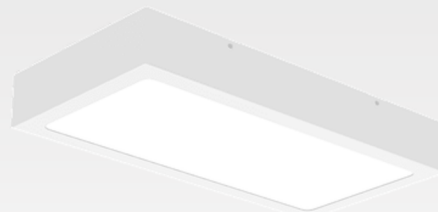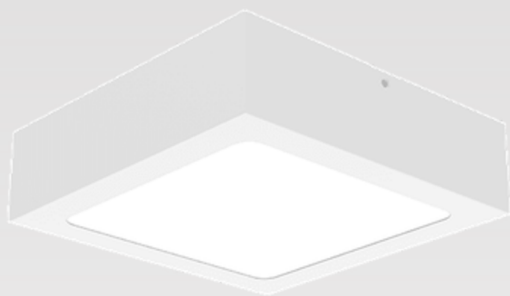

Mechanical

Body : Metal sheet

Frame: Aluminium

Finish: Electrostatic powder paint

Optics: Opal diffuser

Installation: Surface mounted

Electrical

Driver: LED driver with external connection

Light source: SMD LED

Frequency: 220-240V 50/60 Hz

Lifetime: 50.000 hours

Pf>0.90

Operating Temperature: -20 / +50

Optical

Light effect: Direct

Beam angle: 120 degrees

UGR: <21

CRI>80

McAdams Step<3

Options

RAL selection

CRI>90

Micro-prismatic diffuser (UGR<19)

DALI-1-10V-Phase dimming

Casambi - Bluetooth control


Tunable white

Emergency kit - CBS connection


IP44-IP54



Photometric Data




Technical Drawing

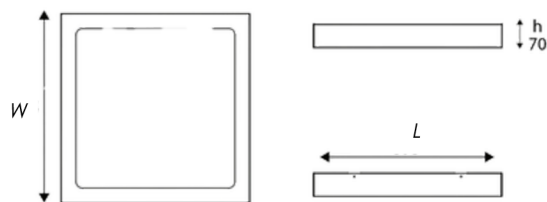

Lumen values can vary according to CCT - CRI and beam angle options

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-951-015	15W	1700*	2700K-6500K	305x305x70	N/A	0,80 kg.
ITS-952-023	23W	2450*	2700K-6500K	305x605x70	N/A	1,10 kg.
ITS-954-036	36W	4140*	2700K-6500K	305x1205x70	N/A	1,80 kg.
ITS-955-070	70W	7800*	2700K-6500K	605x1205x70	N/A	3,00 kg.

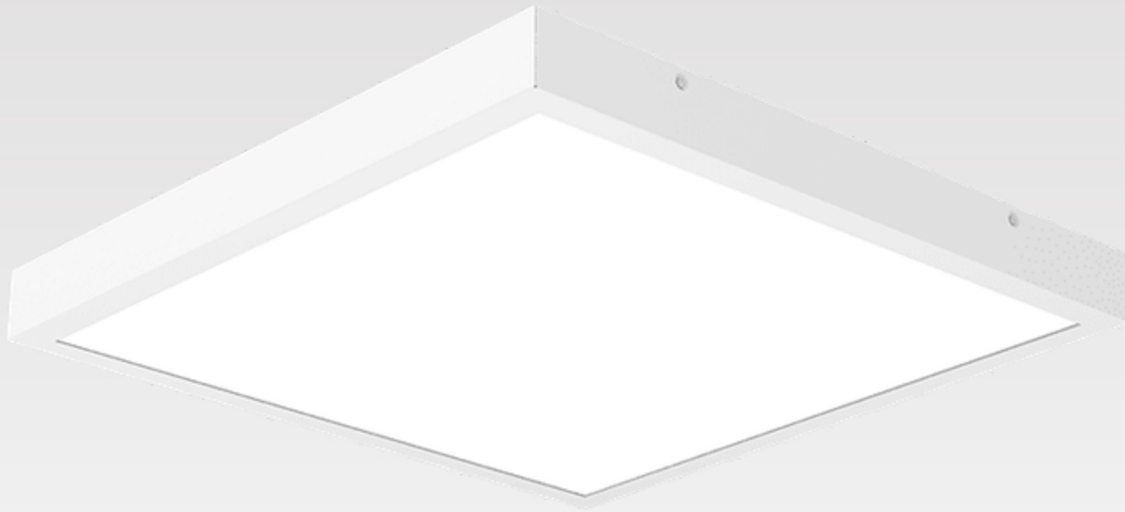

Mechanical

Body : Metal sheet
Frame: Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Surface mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit - CBS connection



Photometric Data



Technical Drawing

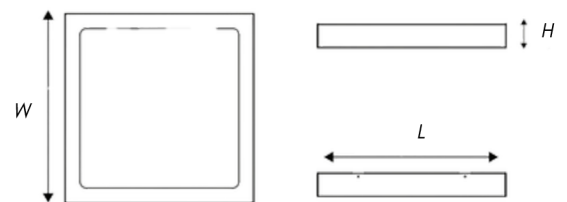

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-958-040	40W	4100*	2700K-6500K	605x605x45	N/A	1,40 kg.
ITS-958-048	48W	4800*	2700K-6500K	605x605x45	N/A	1,40 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Metal sheet
Frame: Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Surface mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit - CBS connection



Photometric Data



Technical Drawing

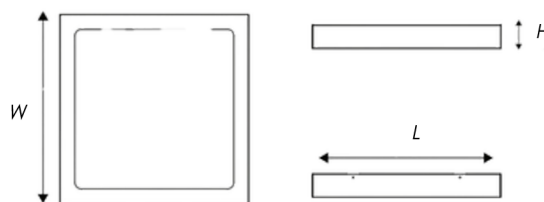

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-956-018	18W	1800*	2700K-6500K	305x305x45	N/A	0,70 kg.
ITS-957-045	45W	4600*	2700K-6500K	305x1205x45	N/A	1,20 kg.
ITS-959-080	80W	8150*	2700K-6500K	605x1205x45	N/A	1,80 kg.

Lumen values can vary according to CCT - CRI and beam angle options



Mechanical

Body : Metal sheet
Finish: Electrostatic powder paint
Optics: Opal diffuser
Cover: Tempered glass
Installation: Recessed mounted

Electrical

Driver: LED driver inside body
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection




Photometric Data

120°



Technical Drawing

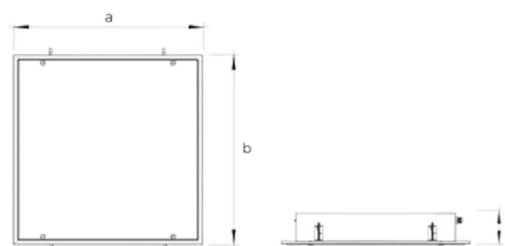

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-910-015	15W	1650 *	2700K-6500K	295x295x60	N/A	2,20 kg.
ITS-911-023	23W	2450 *	2700K-6500K	295X595X60	N/A	3,80 kg.
ITS-912-040	40W	4300 *	2700K-6500K	295X1195X60	N/A	5,50 kg.
ITS-913-040	40W	4300 *	2700K-6500K	595X595X60	N/A	6,00 kg.



Mechanical

Body : Metal sheet
Finish: Electrostatic powder paint
Optics: Opal diffuser
Cover: Tempered glass
Installation: Surface mounted

Electrical

Driver: LED driver inside body
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection



Photometric Data



Technical Drawing

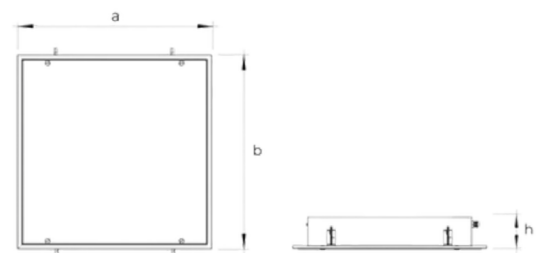

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-915-015	15W	1650*	2700K-6500K	305x305x60	N/A	3,50 kg.
ITS-916-023	23W	2450*	2700K-6500K	305x605x60	N/A	4,50 kg.
ITS-917-040	40W	4300*	2700K-6500K	305x1205x60	N/A	7,50 kg.
ITS-918-040	40W	4300*	2700K-6500K	605x605x60	N/A	7,00 kg.



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection
IP54-IP65 protection



Photometric Data



Technical Drawing

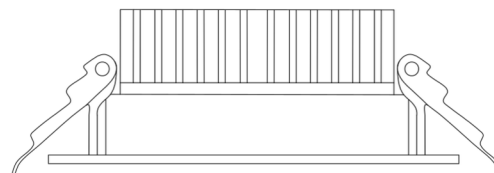

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-501-008	8W	900 *	2700K-6500K	108x55	85	0,60 kg.
IDS-502-012	12W	1280 *	2700K-6500K	128x55	105	0,90 kg.
IDS-503-015	15W	1690 *	2700K-6500K	150x55	130	1,20 kg.
IDS-504-020	20W	2280 *	2700K-6500K	180x55	160	1,40 kg.
IDS-505-025	25W	2600 *	2700K-6500K	200x55	175	1,60 kg.
IDS-506-030	30W	3210 *	2700K-6500K	240x55	210	2,00 kg.



Mechanical

Body : Aluminium

Finish: Electrostatic powder paint

Optics: Opal diffuser

Installation: Recessed mounted

Electrical

Driver: LED driver with external connection

Light source: SMD LED

Frequency: 220-240V 50/60 Hz

Lifetime: 50.000 hours

Pf>0.90

Operating Temperature: -20 / +50

Optical

Light effect: Direct

Beam angle: 120 degrees

UGR: <21

CRI>80

McAdams Step<3

Options

RAL selection

CRI>90

Micro-prismatic diffuser (UGR<19)

DALI-1-10V-Phase dimming

Casambi - Bluetooth control


Tunable white

Emergency kit - CBS connection


IP54-IP65 protection



Photometric Data



Technical Drawing

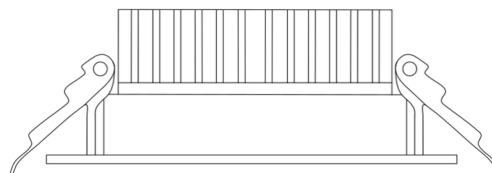

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-507-008	8W	900 *	2700K-6500K	97x55	85	0,60 kg.
IDS-508-012	12W	1280 *	2700K-6500K	128x55	105	0,90 kg.
IDS-509-015	15W	1690 *	2700K-6500K	150x55	130	1,20 kg.
IDS-510-020	20W	2280 *	2700K-6500K	180x55	160	1,40 kg.
IDS-511-025	25W	2600 *	2700K-6500K	200x55	175	1,60 kg.
IDS-512-030	30W	3210 *	2700K-6500K	240x55	210	2,00 kg.



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Aluminium reflector
Diffuser: Transparent plexiglass
Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 60 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit - CBS connection
IP54-IP65 protection



Photometric Data



Technical Drawing

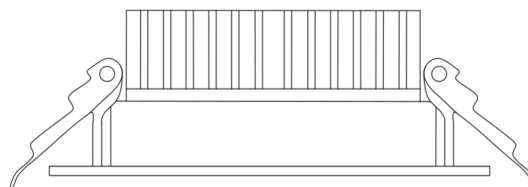

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-513-008	8W	985*	2700K-6500K	108x55	85	0,60 kg.
IDS-514-012	12W	1450*	2700K-6500K	128x55	105	0,90 kg.
IDS-515-015	15W	1750*	2700K-6500K	150x55	130	1,20 kg.
IDS-516-020	20W	2420*	2700K-6500K	180x55	160	1,40 kg.
IDS-517-025	25W	2800*	2700K-6500K	200x55	175	1,60 kg.
IDS-518-030	30W	3450*	2700K-6500K	240x55	210	2,00 kg.



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Recessed mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3


Options

RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-I-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection

Photometric Data



Technical Drawing

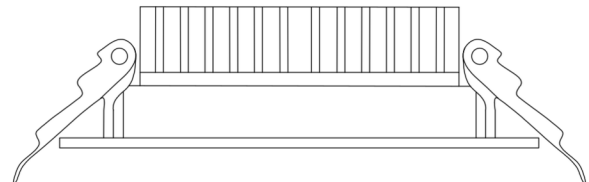

Art. No.	Power	Lumen	Colour Temperature	Dimensions (DxWxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-531-008	8W	900 *	2700K-6500K	108x108x55	85	0,80 kg.
IDS-532-012	12W	1280 *	2700K-6500K	128x128x55	105	1,20 kg.
IDS-533-015	15W	1690 *	2700K-6500K	150x150x55	130	1,45 kg.
IDS-534-020	20W	2280 *	2700K-6500K	180x180x55	160	1,70 kg.
IDS-535-025	25W	2600 *	2700K-6500K	200x200x55	175	1,90 kg.
IDS-536-030	30W	3210 *	2700K-6500K	240x240x55	210	2,10 kg.



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Surface mounted

Electrical

Driver: LED driver inside the body
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options


RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection
IP54-IP65 protection
Suspension kit



Photometric Data



Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-567-008	8W	900*	2700K-6500K	108x100	N/A	1,00 kg.
IDS-568-012	12W	1280*	2700K-6500K	128x100	N/A	1,40 kg.
IDS-569-015	15W	1690*	2700K-6500K	150x100	N/A	1,60 kg.
IDS-570-020	20W	2280*	2700K-6500K	180x100	N/A	1,80 kg.
IDS-571-025	25W	2600*	2700K-6500K	200x100	N/A	2,00 kg.
IDS-572-030	30W	3210*	2700K-6500K	240x100	N/A	2,40 kg.



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent plexiglass
 Installation: Surface mounted

Electrical

Driver: LED driver inside the body
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50


Optical

Light effect: Direct
 Beam angle: 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3


Options

RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit - CBS connection
 IP54-IP65 protection
 Suspension kit


Photometric Data



Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-589-008	8W	985*	2700K-6500K	108x100	N/A	1,00 kg.
IDS-590-012	12W	1450*	2700K-6500K	128x100	N/A	1,40 kg.
IDS-591-015	15W	1750*	2700K-6500K	150x100	N/A	1,60 kg.
IDS-592-020	20W	2420*	2700K-6500K	180x100	N/A	1,80 kg.
IDS-593-025	25W	2800*	2700K-6500K	200x100	N/A	2,00 kg.
IDS-594-030	30W	3450*	2700K-6500K	240x100	N/A	2,40 kg.

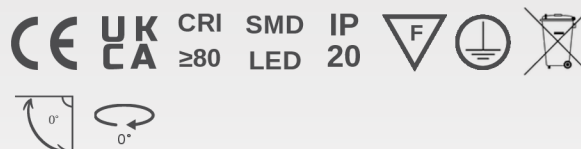

Mechanical

Body : Aluminium

Finish: Electrostatic powder paint

Optics: Opal diffuser

Installation: Recessed mounted

Electrical

Driver: LED driver with external connection

Light source: SMD LED

Frequency: 220-240V 50/60 Hz

Lifetime: >36.000 hours

Operating Temperature: -20 / +50

Optical

Light effect: Direct

Beam angle: 120 degrees

UGR: <21

CRI>80


Options

RAL selection


DALI-1-10V-Phase dimming

Emergency kit - CBS connection


Photometric Data



Technical Drawing

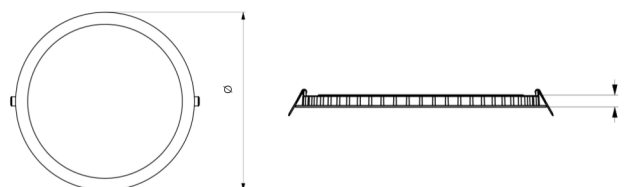

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-551-003	3W	290 *	2700K-6500K	85x10	74	0,12 kg.
IDS-552-006	6W	550 *	2700K-6500K	120x10	106	0,17 kg.
IDS-553-009	9W	795 *	2700K-6500K	145x10	134	0,23 kg.
IDS-554-012	12W	1090 *	2700K-6500K	174x10	154	0,30 kg.
IDS-555-015	15W	1410 *	2700K-6500K	200x10	182	0,37 kg.
IDS-556-018	18W	1640 *	2700K-6500K	225x10	205	0,48 kg.
IDS-557-024	24W	2160 *	2700K-6500K	300x10	276	0,89 kg.

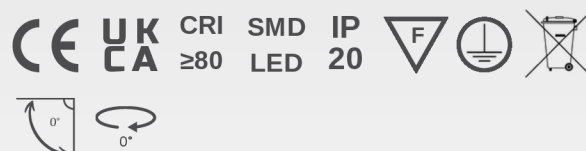

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Surface mounted

Electrical

Driver: LED driver with external connection
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: >36.000 hours
Operating Temperature: -20 / +50


Optical

Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80


Options

RAL selection
DALI-I-10V-Phase dimming
Emergency kit - CBS connection



Photometric Data



Technical Drawing

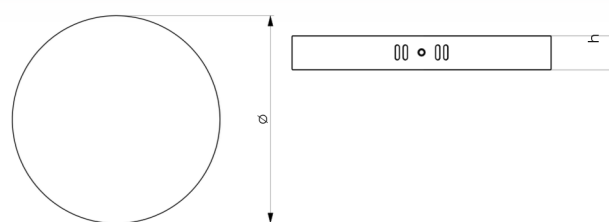

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
IDS-558-006	6W	550*	2700K-6500K	120x39	N/A	0,25 kg.
IDS-559-012	12W	1090*	2700K-6500K	174x39	N/A	0,40 kg.
IDS-560-018	18W	1640*	2700K-6500K	225x39	N/A	0,50 kg.
IDS-561-024	24W	2160*	2700K-6500K	300x39	N/A	0,90 kg.

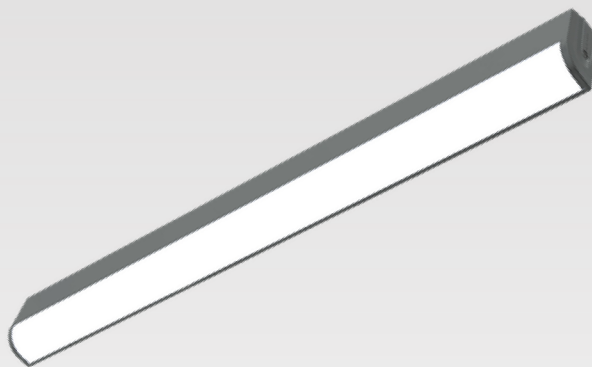

Mechanical

Body : Extruded aluminium
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Surface mounted

Electrical

Driver: LED driver inside the body
Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options

RAL selection
CRI>90
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Emergency kit - CBS connection
IP54 protection

Photometric Data



Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ITS-920-006	6W	700 *	2700K-6500K	61x311x35	N/A	0,35 kg.
ITS-920-010	10W	1200 *	2700K-6500K	61x630x35	N/A	0,56 kg.