TRITON R

Categories: Interior, Linear Lighting

Mechanical

Body : Extruded aluminium profile
Finish: Electrostatic powder paint
Optics: Opal diffuser
Installation: Recessed mounted

Electrical

Light source: SMD LED
Frequency: 220-240V 50/60 Hz
Lifetime: 50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

Light effect: Direct
Beam angle: 120 degrees
UGR: <21
CRI>80
McAdams Step<3

Options

RAL selection
CRI>90
Micro-prismatic diffuser (UGR<19)
DALI-1-10V-Phase dimming
Casambi - Bluetooth control
Tunable white
Emergency kit - CBS connection
Continiuos lighting

CE UK CA CRI ≥80 SMD LED IP 40

Photometric Data



Technical Drawing

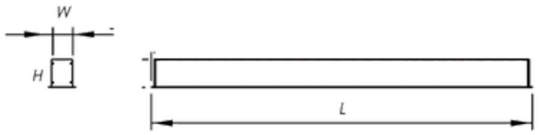

*Custom lengths according to project drawings is available.

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
ILS-608-100	25W/mt.	2900*	2700K-6500K	45x1000x65	30x985	1,20 kg.
ILS-618-100	25W/mt.	2900*	2700K-6500K	72x1000x65	50x985	1,40 kg.
ILS-628-100	40W/mt.	4500*	2700K-6500K	95x1000x65	75x985	1,70 kg.

Lumen values can vary according to CCT - CRI and beam angle options