TERRA R

Categories: Facade Lighting

Mechanical

Body : Extruded aluminium
Frame: Stainless steel
Finish: Eloxal plated
Optics: LED lenses
Diffuser: Tempered glass
Installation: In-ground recessed mounted

Electrical

Driver: LED driver inside the body
Light source: Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: >50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

Light effect: Direct
Beam angle: 15-30-45-60 degrees
UGR: <23
CRI>80
McAdams Step<3

Options

DALI-1-10V
RGB
DMX control

CE UK CA CRI ≥80 POWER LED IP 67

Photometric Data

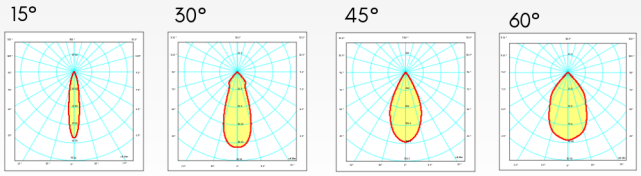

Technical Drawing

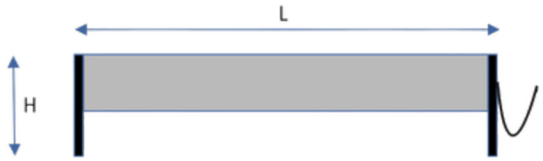

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
EFS-007-003	3W	420*	2700K-6500K	62x110x67	N/A	0,50 kg.
EFS-007-006	6W	800*	2700K-6500K	62x180x67	N/A	0,80 kg.
EFS-007-009	9W	1250*	2700K-6500K	62x260x67	N/A	1,10 kg.
EFS-007-018	18W	2520*	2700K-6500K	62x490x67	N/A	1,60 kg.
EFS-007-024	24W	3350*	2700K-6500K	62x650x67	N/A	2,20 kg.
EFS-007-036	36W	5040*	2700K-6500K	62x970x67	N/A	2,60 kg.

Lumen values can vary according to CCT - CRI and beam angle options