# FLO

Categories: Exterior, Road Lighting

## FEATURES

### Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: PMMA lenses
Diffuser: Transparent glass
Installation: Ground mounted with anchorage

### Electrical

Light source: Mid Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: >50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

### Optical

Light effect: Symmetrical
CRI>70
McAdams Step<3

### Options

RAL selection
DALI - 1-10V - Step dim
Length options

CE UK CA CRI ≥70 POWER LED IP 65 IK 10

### Photometric Data



Symmetric

### Technical Drawing

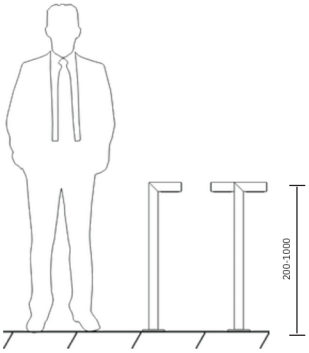


| Art. No. | Power | Lumen | Colour Temperature | Dimensions (QxH) mm. | Cut-out (mm.) | Weight (kg.) |
|---|---|---|---|---|---|---|
| EUS-320-010 | 1x10W | 1300* | 3000K-6500K | 200x1000 | N/A | 5,00 kg. |
| EUS-321-020 | 2x10W | 2600* | 3000K-6500K | 200x1000 | N/A | 5,00 kg. |

Lumen values can vary according to CCT - CRI and beam angle options