



## FEATURES

### Mechanical

- Body : Aluminium
- Finish: Electrostatic powder paint
- Optics: PMMA lenses
- Diffuser: Opal glass
- Installation: Ground mounted

### Electrical

- Light source: Mid Power LED
- Frequency: 220-240V 50/60 Hz
- Lifetime: >50.000 hours
- Pf>0.90
- Operating Temperature: -20 / +50

### Optical


- Light effect: Symmetrical
- CRI>70
- McAdams Step<3

### Options

- RAL selection
- DALI - 1-10V - Step dim




### Photometric Data



Symmetric

### Technical Drawing

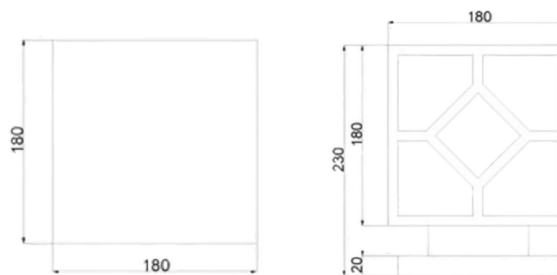

Lumen values can vary according to CCT - CRI and beam angle options

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
EUS-328-010	10W	1200*	3000K-6500K	180x230	N/A	2,00 kg.
EUS-328-020	20W	2400*	3000K-6500K	180x230	N/A	2,00 kg.