


FLORA S

Categories: Exterior, Road Lighting

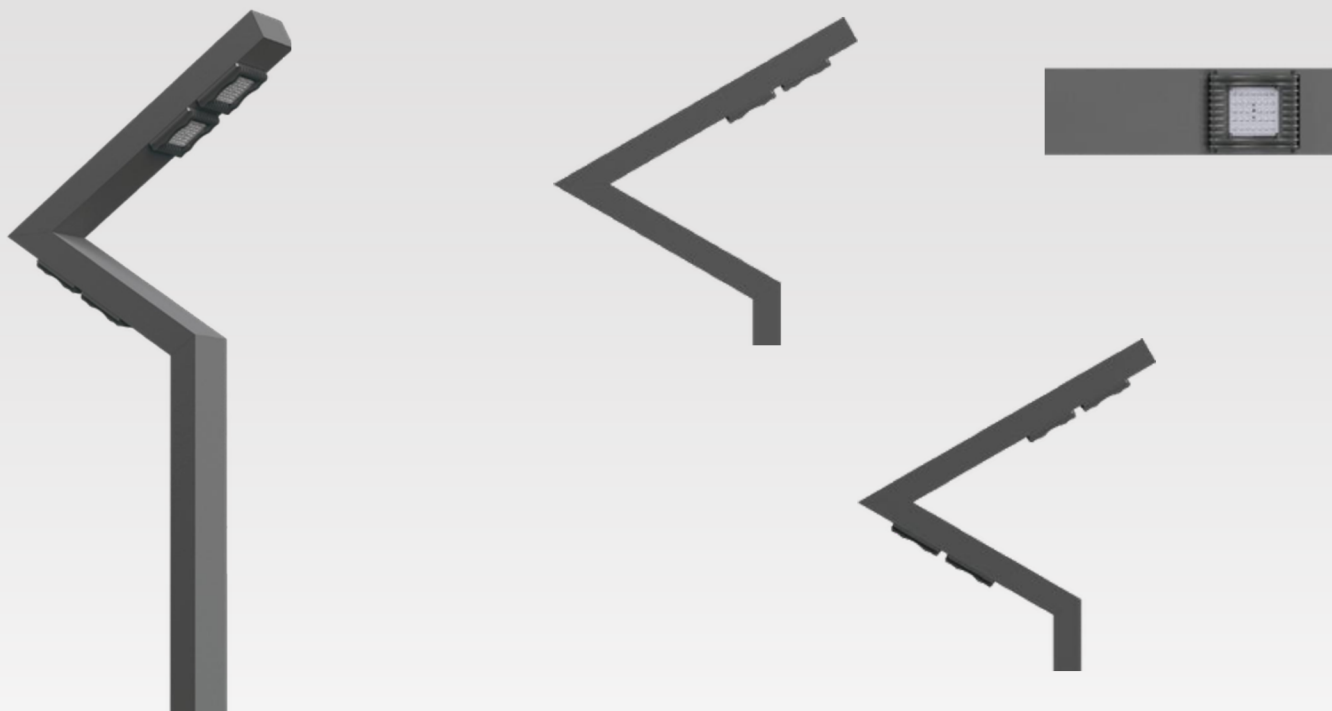

FEATURES

Mechanical

Body : Extruded aluminium profile
 Finish: Electrostatic powder paint
 Optics: PMMA lenses
 Diffuser: Transparent glass
 Installation: Ground mounted with anchorage

Electrical


Light source: Mid Power LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: >50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Symmetrical or asymmetrical options
 CRI>80
 McAdams Step<3

Options


RAL selection
 DALI - 1-10V - Step dim
 Length options



Photometric Data




Asymmetric



Symmetric

Technical Drawing

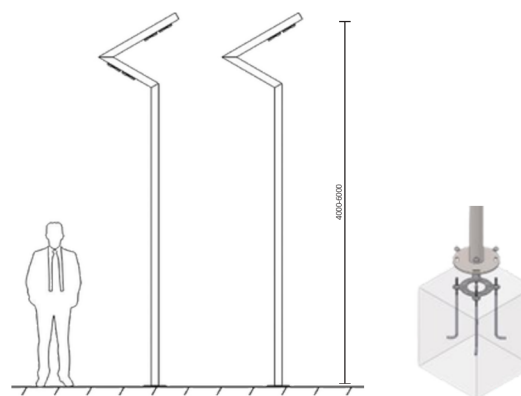

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
EUS-302-030	1x30W	3310*	3000K-6500K	80x4000x150	N/A	8,20 kg.
EUS-302-040	1x40W	4500*	3000K-6500K	80x4000x150	N/A	8,20 kg.
EUS-302-060	1x60W	6600*	3000K-6500K	80x4000x150	N/A	8,20 kg.

Lumen values can vary according to CCT - CRI and beam angle options