



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Asymmetrical louvre
 Diffuser: Tempered glass
 Installation: Recessed mounted

Electrical

Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: >50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Direct
 Beam Angle: 120 degrees
 CRI>80
 McAdams Step<3

Options

RAL selection


CE UK CA CRI ≥80 COB LED IP 65 IK 10 F

Photometric Data



Asymmetric

Technical Drawing

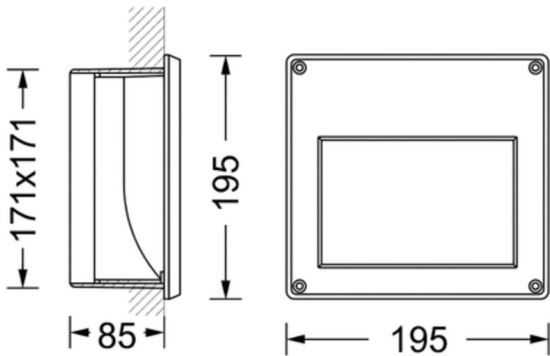

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-Out mm.	Weight (kg.)
EFS-036-011	11W	1050*	3000K-6500K	195x195	171x171	1,40 kg.