



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: PC lenses
Installation: Wall surface mounted

Electrical


Light source: Mid Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: >50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Up&Down or Single Direction
Beam Angle: 15-30-45-60 degrees
CRI>80
MacAdams Step<3

Options


RAL selection



Photometric Data

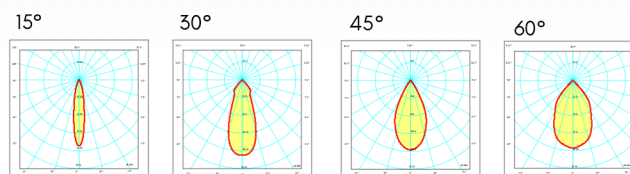

Technical Drawing

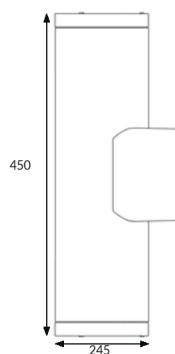

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Light Direction	Weight (kg.)
EFS-030-040	2x20W	4400*	3000K-6500K	245x450	Up&Down	2,50 kg.