



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: LED lenses
 Installation: Ceiling recessed mounted

Electrical

Driver: LED driver with external connection
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Fixed
 Beam angle: 15-24-36-60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Options


RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Emergency kit / CBS connection



Photometric Data

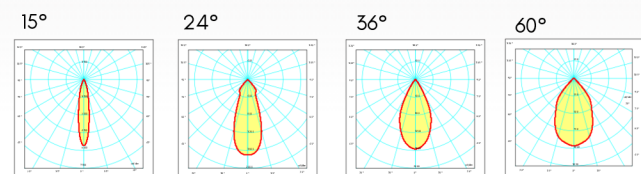

Technical Drawing

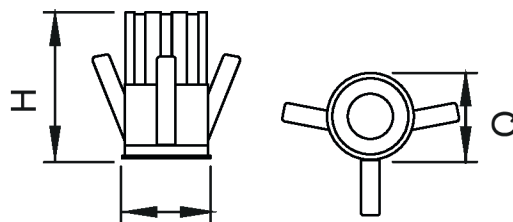

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-426-005	5W	600*	2700K-6500K	35x56	30	0,10 kg.
ISS-427-012	12W	1300*	2700K-6500K	50x68	45	0,15 kg.