



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Aluminium reflector
 Diffuser: Transparent safety glass
 Installation: Ceiling surface mounted

Electrical

Driver: LED driver inside the body
 Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Fixed
 Beam angle: 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Options


RAL selection
 CRI>90
 DALI-1-10V-Phase dimming
 Casambi - Bluetooth control
 Suspension kit



Photometric Data



Technical Drawing

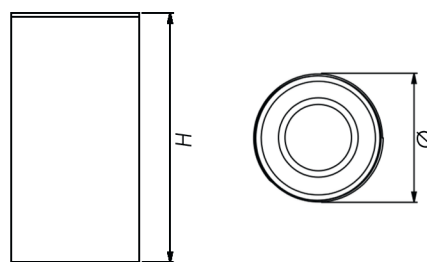

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
ISS-475-010	10W	1200 *	2700K-6500K	75x100	N/A	0,3 kg.
ISS-476-015	15W	1800 *	2700K-6500K	95x100	N/A	0,4 kg.
ISS-477-020	20W	2400 *	2700K-6500K	115x152	N/A	0,7 kg.
ISS-477-030	30W	3600 *	2700K-6500K	115x152	N/A	0,7 kg.
ISS-478-040	40W	4800 *	2700K-6500K	140x162	N/A	1,0 kg.