



### Mechanical

Body : Aluminium  
Finish: Electrostatic powder paint  
Optics: Aluminium reflector  
Diffuser: Transparent safety glass  
Installation: Track mounted

### Electrical

Light source: COB LED  
Frequency: 220-240V 50/60 Hz  
Lifetime: 50.000 hours  
Pf>0.90  
Operating Temperature: -20 / +50

### Optical


Light effect: Directional, 180° vertical, 350° horizontal  
Beam angle: 15-30-45 degrees  
UGR: <21  
CRI>80  
McAdams Step<3

### Options


RAL selection  
CRI>90  
DALI  
Casambi - Bluetooth control  
1-Phase or 3-Phase track connection



### Photometric Data

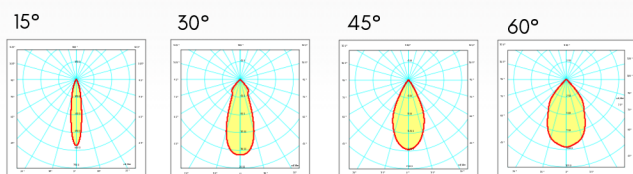

### Technical Drawing



| Art. No.    | Power | Lumen | Colour Temperature | Dimensions (QxH1-H2) mm. | Cut-out (mm.) | Weight (kg.) |
|-------------|-------|-------|--------------------|--------------------------|---------------|--------------|
| ITL-110-015 | 15W   | 1680* | 2700K-6500K        | 60x125-132               | N/A           | 0,30 kg.     |
| ITL-110-020 | 20W   | 2490* | 2700K-6500K        | 60x125-132               | N/A           | 0,30 kg.     |
| ITL-111-030 | 30W   | 3700* | 2700K-6500K        | 80x125x150               | N/A           | 0,50 kg.     |
| ITL-112-040 | 40W   | 4500* | 2700K-6500K        | 90x132x155               | N/A           | 0,85 kg.     |

Lumen values can vary according to CCT - CRI and beam angle options