



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: Asymmetrical louvre
Diffuser: Tempered glass
Installation: Recessed mounted

Electrical


Light source: COB LED
Frequency: 220-240V 50/60 Hz
Lifetime: >50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Direct
Beam Angle: 120 degrees
CRI>80
McAdams Step<3

Options

RAL selection




Photometric Data



Asymmetric

Technical Drawing

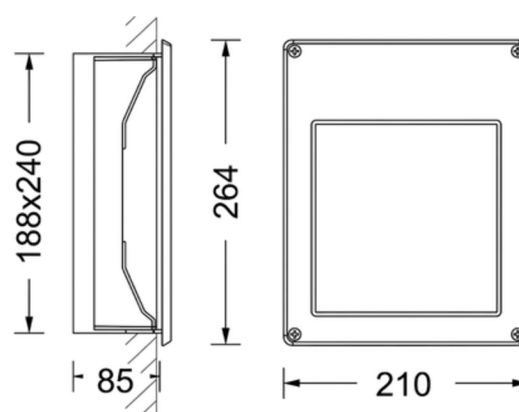

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-Out mm.	Weight (kg.)
EFS-037-015	15W	1400*	3000K-6500K	210x264	188x240	1,40 kg.