

DRIVE XL

In-ground drive over lighting

NERA
LIGHT



Moving Load Resistance : 2000 kg - 20 km/h

Mechanical

Body : Extruded aluminium

Frame: Stainless steel

Finish: Eloxal plated

Optics: LED lenses

Diffuser: Heat & pressure resistant 15 mm. thick tempered glass

Installation: In-ground recessed mounted - including installation box

Electrical

Driver: LED driver inside the body

Light source: Power LED

Frequency: 220-240V 50/60 Hz

Lifetime: >50.000 hours

Pf>0.90

Operating Temperature: -20 / +50

Optical

Light effect: Rotational

Beam angle: 15-30-45-60 degrees

CRI>80

McAdams Step<3

Options

DALI-1-10V


RGB

DMX control


Beam angle options



Photometric Data

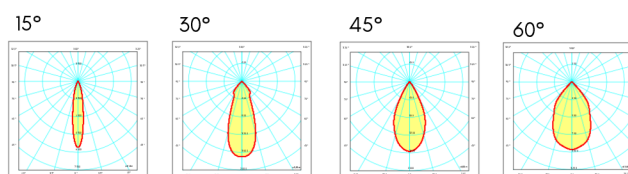

Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
EFS-023-045	45W	5400*	3000K-6500K	300x305	240	3,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options