ERA

Outdoor wall light - single or up&down light options

CRI ≥80 | POWER LED | IP 65 | IK 10

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: PC lenses
Installation: Wall surface mounted

Electrical

Light source: Mid Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: >50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical

Light effect: Up&Down or Single Direction
Beam Angle: 15-30-45-60 degrees
CRI>80
McAdams Step<3

Options

RAL selection

Photometric Data

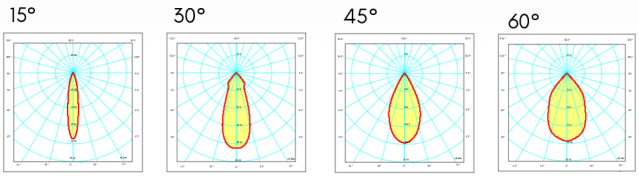

Technical Drawing

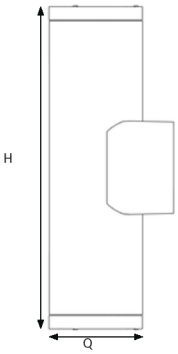

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Light Direction	Weight (kg.)
EFS-031-020	2x10W	2200*	3000K-6500K	100x300	Up&Down	1,20 kg.
EFS-032-040	2x20W	4400*	3000K-6500K	150x400	Up&Down	2,50 kg.
EFS-032-060	2x30W	6600*	3000K-6500K	150x400	Up&Down	2,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options