



Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: PC lenses
Diffuser: Transparent glass
Installation: Ground mounted

Electrical


Light source: Mid Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: >50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Rotational
Beam Angle: 15-30-45-60 degrees
CRI>80
McAdams Step<3

Options


RAL selection
DALI - 1-10V - Step dim
Spike



Photometric Data

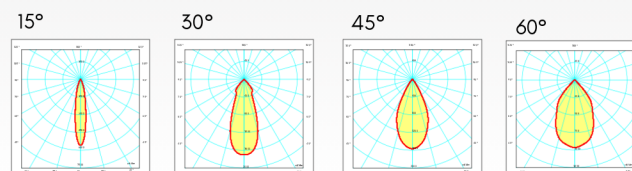

Technical Drawing

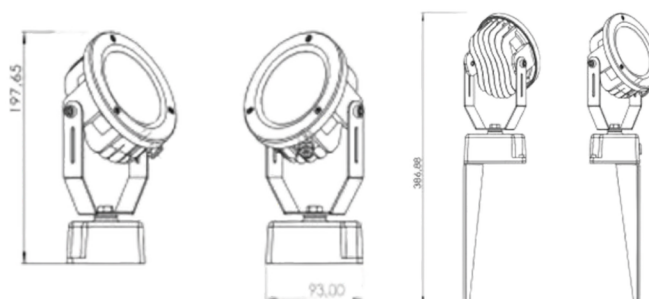

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
EFS-024-010	10W	1400*	3000K-6500K	93x197	N/A	2,50 kg.
EFS-024-015	15W	2100*	3000K-6500K	93x197	N/A	2,50 kg.
EFS-024-020	20W	2800*	3000K-6500K	93x197	N/A	2,50 kg.

Lumen values can vary according to CCT - CRI and beam angle options