

Mechanical

Body : Aluminium
Finish: Electrostatic powder paint
Optics: PC lenses
Diffuser: Transparent glass
Installation: Ground mounted

Electrical

Light source: Mid Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: >50.000 hours
Pf>0.90
Operating Temperature: -20 / +50


Optical

Light effect: Rotational
Beam Angle: 6-15-30-45 degrees
CRI>80
McAdams Step<3


Options

RAL selection
DALI - 1-10V - Step dim
Spike
Honeycomb louvre

Photometric Data

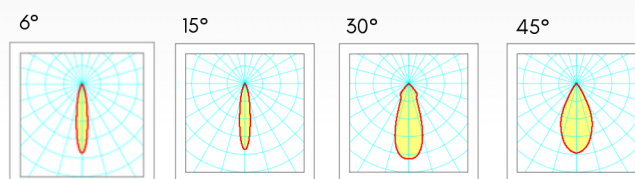

Technical Drawing

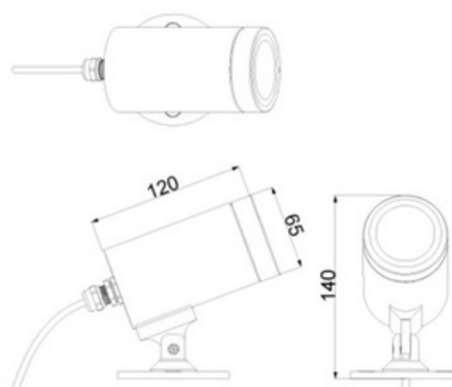

Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH) mm.	Cut-out (mm.)	Weight (kg.)
EFS-025-006-830	6W	720*	3000K	85x112	N/A	0,70 kg.
EFS-025-010-830	10W	1100*	3000K	85x112	N/A	0,70 kg.

Lumen values can vary according to CCT - CRI and beam angle options