



Mechanical

Body : Extruded aluminium
Finish: Eloxal plated
Optics: LED lenses
Diffuser: Tempered glass
Installation: Surface mounted - adjustable mechanism

Electrical

Driver: LED driver inside the body
Light source: Power LED
Frequency: 220-240V 50/60 Hz
Lifetime: >50.000 hours
Pf>0.90
Operating Temperature: -20 / +50

Optical


Light effect: Wallwasher
Beam angle: 15-30-45-60 degrees
CRI>80
McAdams Step<3

Options


DALI-1-10V
RGB
DMX control



Photometric Data

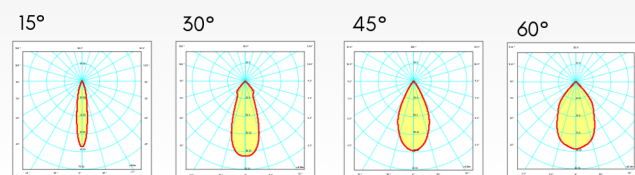

Technical Drawing

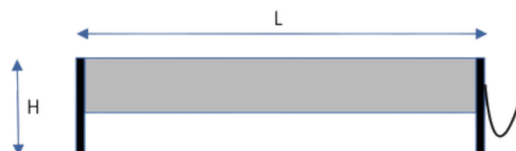

Art. No.	Power	Lumen	Colour Temperature	Dimensions (WxLxH) mm.	Cut-out (mm.)	Weight (kg.)
EFS-006-007	7W	840*	2700K-6500K	61x180x185	N/A	0,30 kg.
EFS-006-011	11W	1260*	2700K-6500K	61x270x185	N/A	0,50 kg.
EFS-006-014	14W	1680*	2700K-6500K	61x340x185	N/A	0,70 kg.
EFS-006-022	22W	2550*	2700K-6500K	61x490x185	N/A	1,00 kg.
EFS-006-029	29W	3400*	2700K-6500K	61x650x185	N/A	1,20 kg.
EFS-006-043	43W	5040*	2700K-6500K	61x970x185	N/A	1,60 kg.
EFS-006-055	55W	6800*	2700K-6500K	61x1250x185	N/A	1,90 kg.

Lumen values can vary according to CCT - CRI and beam angle options