



Mechanical

Body : Aluminium
 Finish: Electrostatic powder paint
 Optics: Zoomable optics
 Diffuser: Transparent safety glass
 Installation: Track mounted

Electrical

Light source: COB LED
 Frequency: 220-240V 50/60 Hz
 Lifetime: 50.000 hours
 Pf>0.90
 Operating Temperature: -20 / +50

Optical


Light effect: Directional, 180° vertical, 350° horizontal
 Beam angle: Adjustable between 10 to 60 degrees
 UGR: <21
 CRI>80
 McAdams Step<3

Options


RAL selection
 CRI>90
 DALI
 Casambi - Bluetooth control
 1-Phase or 3-Phase track connection



Photometric Data

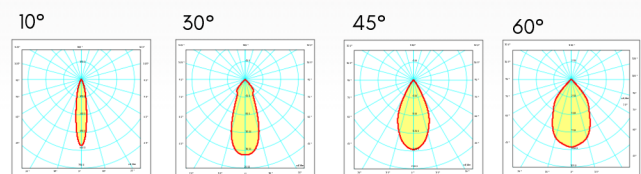

Technical Drawing



Art. No.	Power	Lumen	Colour Temperature	Dimensions (QxH1-H2) mm.	Cut-out (mm.)	Weight (kg.)
ITL-113-010	10W	1200*	2700K-6500K	57x134-160	N/A	0,45 kg.
ITL-114-015	15W	1690*	2700K-6500K	75x163	N/A	0,70 kg.
ITL-114-020	20W	2380*	2700K-6500K	75x163	N/A	0,70 kg.
ITL-115-030	30W	3350*	2700K-6500K	90x185-210	N/A	1,2 kg.
ITL-115-040	40W	4500*	2700K-6500K	90x185-210	N/A	1,2 kg.